

2020

WIND AND WAVE CONDITIONS – PORT MOUTON – MARINE FINFISH LEASE 0835

Prepared by: Meysam Karimi, PhD, Dean Steinke, P.Eng.

Title	Wind and Wave Conditions – Port Mouton –
	Marine Finfish Lease 0835
DSA Document	Report-DSA-CMAR-19EXM-Port Mouton Wind and Wave Conditions RevB.0.docx
Revision	В
Author	Meysam Karimi, PhD
Co-authors	Dean Steinke, P.Eng
Prepared for	CMAR
Client reference /	N/A
project	
DSA project	CMAR-19EXM
Last revised	2020-04-21
Pages (incl. Grove Br)	25

DSA Pacific Office

201-754 Broughton St Victoria, BC V8W 1E1 +1.250.483.7207

DSA Atlantic office

210 – 3600 Kempt Road Halifax, NS B3K 4X8 +1.902.407.3722

info@dsaocean.com www.dsaocean.com



Title	Wind and Wave Conditions – Port N	louton – Marine Finfish	n Lease 0835	le.
Revision	В	Date Last Revised	2020-04-21	
DSA Project	CMAR-19EXM	Client Project /	N/A	\sim
		Reference		DS



Revision history

Revision	Revision description	Date	Summary of changes / additions	Revisions by	Checked by	Approved for release by	Issued to
Α	IFR	2020- 04-20	Report draft	MK	DS	DS	CMAR
В	IFR	2020- 04-21	Approved for public release	МК	DS	DS	CMAR

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			
Revision	В	Date Last Revised	2020-04-21	**
DSA Project	CMAR-19EXM	Client Project /	N/A	$\overrightarrow{\mathcal{D}}$
		Reference		DS




Executive Summary

In support of Centre for Marine Applied Research (CMAR), the following report presents wind and wave conditions at one site near Port Mouton, Nova Scotia, Canada.

In this report, wave and wind conditions are presented for:

Marine Finfish Lease- 0835: 43° 54.903'N, 64° 48.727'W.

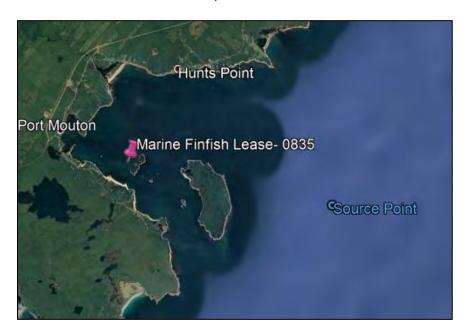

To determine the wave field evolution closer to shore at a specific site, and to determine more accurate 10 and 50 year return period wave data, near shore wave modelling can be used. For the Port Mouton area, STWave was used to model the nearshore wave conditions. The results showed reduced wave heights, in comparison to the hindcast model source point, due to depth induced energy dissipation (bottom friction, breaking). The STWave model results are determined using wind and wave boundary condition data from the MSC50 HindCast model of a nearby offshore location. The extreme wave conditions at the reference locations are determined in part by propagating wave from the offshore hindcast model location into the site of interested.


Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			
Revision	В	Date Last Revised	2020-04-21	
DSA Project	CMAR-19EXM	Client Project /	N/A	
		Reference		



Contents

R	evision	history	2
E	kecutiv	e Summary	3
С	ontents	5	4
Fi	gures		4
Ta	ables		5
1	Intr	oduction	6
	1.1	Overview	6
	1.2	Objective(s)	
2		reviations and acronyms	
3		erence documents and drawings	
		ve conditions	
4			
	4.1	Overview	
	4.2	Wave Model Description	
	4.3	Boundary conditions – offshore wind and wave conditions	
	4.4	Wave modeling results	20
	4.4.	1 Wave/wind conditions for Port Mouton- Marine Finfish Lease- 0835	23
F	igure	es ·	
Fi	gure 1	One (1) site location at Port Mouton [4]	6
Fi	gure 2	Port Mouton, Nova Scotia, Canada	7
	_	Bathymetry at site on hydrographic charts- Depth reported in meters	
	_	Bathymetry at site on STWave	
	-	Wave height versus wave direction plot for the source point	
	-	Wind speed versus wind direction plot for the source point	
	_	Extreme value analysis on wind data – for Source Point offshore location [1]	
	_	Extreme value analysis on wave data – for Source Point offshore location [1]	
	•	Maximum wind speed at 10 year return period and direction [from]- for Source Point offsh	
		D Maximum wind speed at 50 year return period and direction [from]- for Source Point offsl	
	•	[1]	
		L Maximum wave height at 10 year return period and direction [from]- for Source Point offs	
	-	[1]	

Title	Wind and Wave Conditions – Port M	1outon – Marine Finfis	h Lease 0835	No.
Revision	В	Date Last Revised	2020-04-21	
DSA Project	CMAR-19EXM	Client Project /	N/A	$\dot{\chi}$
		Reference		DS

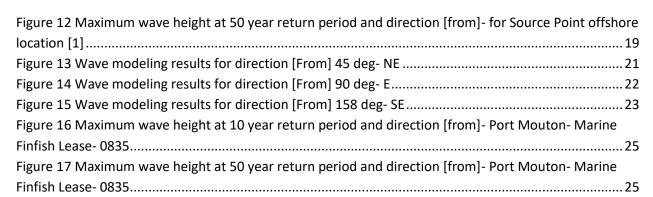

Tables

Table 1 Results extreme value analysis for wind and waves at the offshore source point locatio	n in Figure
4	17
Table 2 T _p values used in analysis	20
Table 3 Estimated wave and wind design conditions for Port Mouton- Centre Point- 0835	23

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			
Revision	В	Date Last Revised	2020-04-21	80
DSA Project	CMAR-19EXM	Client Project /	N/A	XX
		Reference		DSA.

1 Introduction

1.1 Overview

For the location in Port Mouton shown in Figure 1, wind and wave conditions have been estimated. The following presents data on the predicted 10 and 50 year wind and wave conditions at this location.



Figure 1 One (1) site location at Port Mouton [4]

Port Mouton is overall protected from offshore waves by surrounded lands, but is vulnerable to waves from the east and southeast which will travel directly into the region, as can be seen in Figure 2. These waves are expected to lose energy by travelling into shallower waters. Detailed wave modelling is required to determine the amount of energy lost and wave height reduction.

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			
Revision	В	Date Last Revised	2020-04-21	80
DSA Project	CMAR-19EXM	Client Project /	N/A	XXX
		Reference		DSA.



Figure 2 Port Mouton, Nova Scotia, Canada

The context of this project is that extreme wind and wave conditions are needed to select engineering load cases for those wishing to install finfish or shellfish farms in the area. For example, extreme environmental conditions with minimum 10-year and 50-year return periods are required for the design of a marine fish farm site, as per guidance in the Scottish technical standard [2], and NS9415 [3]. While the location assessed as part of this modeling exercise is an actual aquaculture site location, the data produced for this location is useful for understanding the approximate wave climate in the region and can be used to evaluate any proposals for sites in the area. Understanding the wind and wave climates at aquaculture sites is important for mitigating risks.

1.2 Objective(s)

• Determine wave/wind conditions at one location in Port Mouton and find the conditions with 10 and 50 year return periods.

2 Abbreviations and acronyms

DSA	Dynamic Systems Analysis Ltd.
SMS	Surface-water Modeling System
CMAR	Centre for Marine Applied Research
CHS	Canadian Hydrographic Services

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			le.
Revision	В	Date Last Revised	2020-04-21	
DSA Project	CMAR-19EXM	Client Project /	N/A	$\mathcal{M}_{\mathcal{F}}$
		Reference		DSA.

3 Reference documents and drawings

[1]	V. Swail, V. Cardone, M. Ferguson, D. Gummer, E. Harris, E. Orelup, and A. Cox, "The msc50
	wind and wave reanalysis," in 9th International Workshop On Wave Hindcasting and
	Forecasting, 2006.
[2]	Marine Scotland. (2015). A Technical Standard for Scottish Finfish Aquaculture. Ministerial
	Group for Sustainable Aquaculture's Scottish Technical Standard Steering Group
[3]	Norge, S. (2009). Norwegian Standard NS 9415. E: 2009. Marine Fish Farms—Requirements
	for Site Survey, Risk Analyses, Design, Dimensioning, Production, Installation and
	Operation. Standard Norge, Lysaker.
[4]	CMAR approved sites -RevB.kmz

4 Wave conditions

4.1 Overview

SMS version 12.2.13 was used to setup the bathymetric and computational grid. This section provides a description of the grid size, mesh size and offshore environmental conditions. Site bathymetry is provided in Figure 3. Note that a CHS hydrographic chart is used to generate the bathymetric data for wave modeling.

Title	Wind and Wave Conditions – Port N	1outon – Marine Finfisl	h Lease 0835	100
Revision	В	Date Last Revised	2020-04-21	200
DSA Project	CMAR-19EXM	Client Project /	N/A	33)
		Reference		DSf



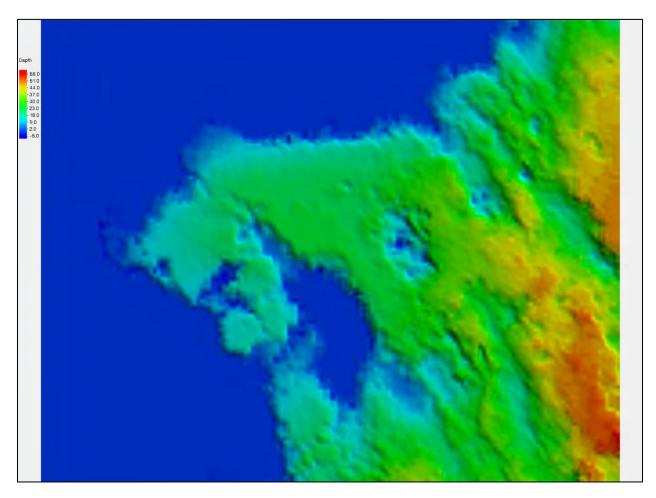


Figure 3 Bathymetry at site on hydrographic charts- Depth reported in meters

4.2 Wave Model Description

SMS, created by Aquaveo, is a modelling suite in which various water surface modelling tools, like wave and flow models, can be used. For this analysis SMS in combination with STWave is used. STWave is a nearshore spectral Hydraulics model, developed by U.S. Army Engineer Research and Development Center (ERDC) and Coastal and Hydraulics Laboratory (CHL). It is capable of modelling accurately wave transformation and propagation.

Two grids have to be setup, computational grid and spectral grid. The computational grid and its mesh sizes are mainly defined by the bathymetry. The bathymetry in SMS is presented in Figure 4. For this analysis the computational grid size was $14.1 \text{km} \times 11.7 \text{km}$. The mesh size was $10 \text{m} \times 10 \text{m}$, resulting in $1414 \times 1169 = 1,652,966$ grid cells.

The spectral domain was divided into 72 directions and 50 frequencies, with a minimum frequency of 0.03Hz and a maximum frequency of 1.01Hz.

Title	Wind and Wave Conditions – Port M	1outon – Marine Finfisl	h Lease 0835	100-
Revision	В	Date Last Revised	2020-04-21	200
DSA Project	CMAR-19EXM	Client Project /	N/A	<i>3</i> 57)
		Reference		DSf



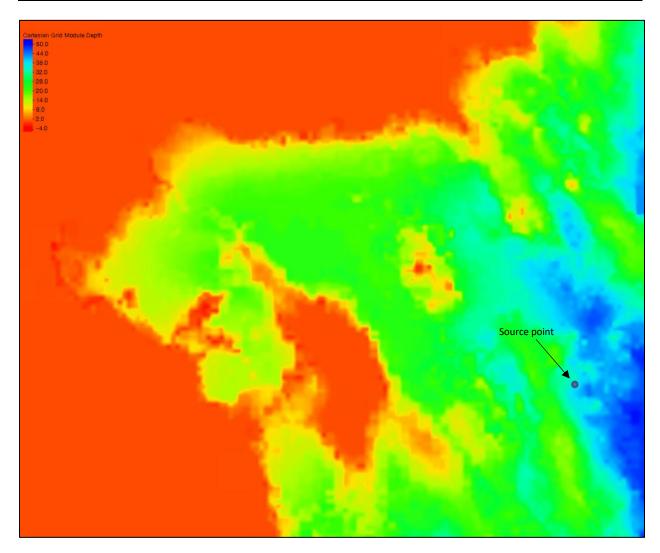


Figure 4: Bathymetry at site on STWave

4.3 Boundary conditions - offshore wind and wave conditions

The MSC50 HindCast model [1] data from location 43° 54.000'N, 64° 42.000'W was used to determine the 10 and 50 year return periods for wind and wave of the Port Mouton site location; the location is labelled as the "Source point" in Figure 4. The scatter plot of wave heights versus wave directions for the source point is shown in Figure 5. The scatter plot of wind speeds versus wind directions for the source point is also shown in Figure 6. Extreme waves and wind at the source point appear to originate more frequently from the east and southeast.

Title	Wind and Wave Conditions – Port M	1outon – Marine Finfish	1 Lease 0835	le.
Revision	В	Date Last Revised	2020-04-21	
DSA Project	CMAR-19EXM	Client Project /	N/A	\sim
		Reference		DS

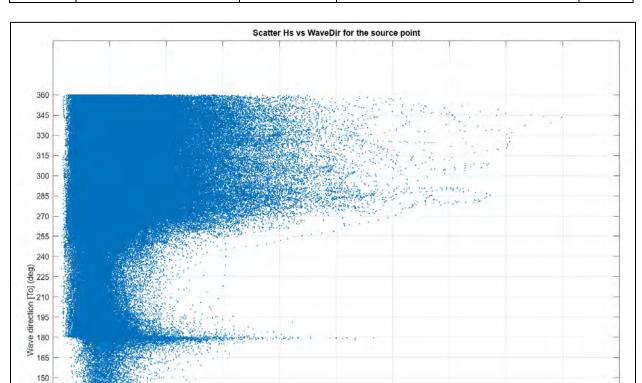


Figure 5 Wave height versus wave direction plot for the source point

Hs (m)

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			
Revision	В	Date Last Revised	2020-04-21	
DSA Project	CMAR-19EXM	Client Project /	N/A	
		Reference		



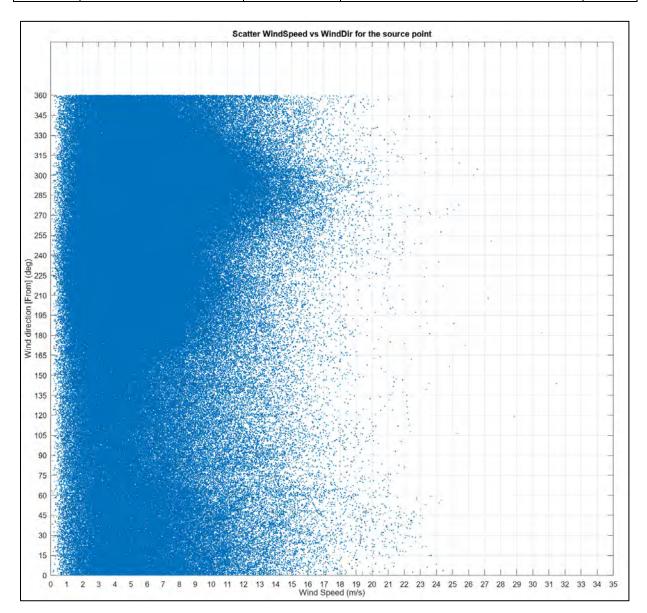


Figure 6 Wind speed versus wind direction plot for the source point


10 and 50 year return period conditions are in general achieved by:

- Obtaining measured or hindcast data for parameter in question
- For each parameter, bin data by direction
- Perform extreme value analysis.
 - Extract annual maxima
 - o Fit Gumbel or Weibull distribution to this data
 - Use fitted distribution to calculate values corresponding to 10 and 50 year return period


The extreme value analysis of the wind velocities is presented in Figure 7. U10 and U50 represent the 10 and 50 year return period wind velocities, respectively.

Title	Wind and Wave Conditions – Port M	1outon – Marine Finfisl	n Lease 0835	le.
Revision	В	Date Last Revised	2020-04-21	200
DSA Project	CMAR-19EXM	Client Project /	N/A	JO k
		Reference		DSA



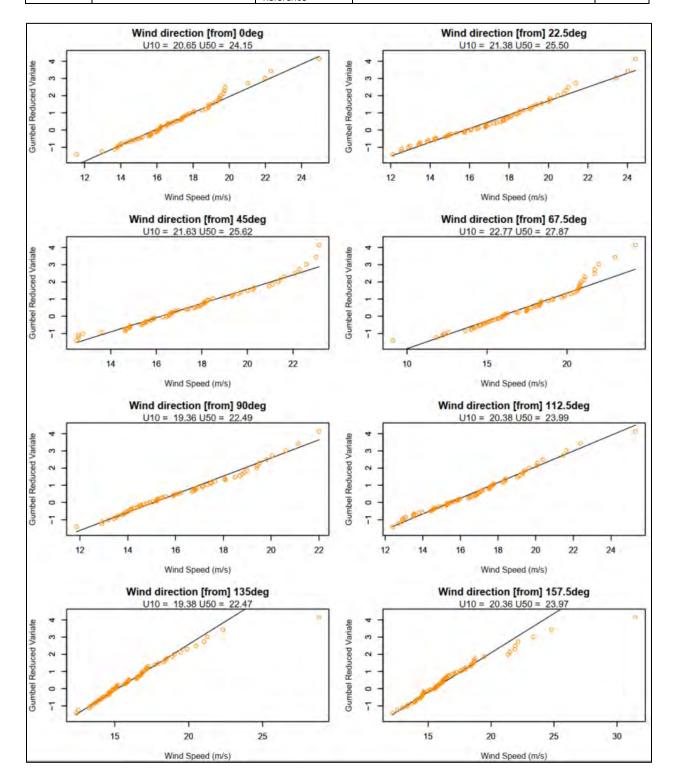

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			100.
Revision	В	Date Last Revised	2020-04-21	
DSA Project	CMAR-19EXM	Client Project /	N/A	XX
		Reference		DSA.




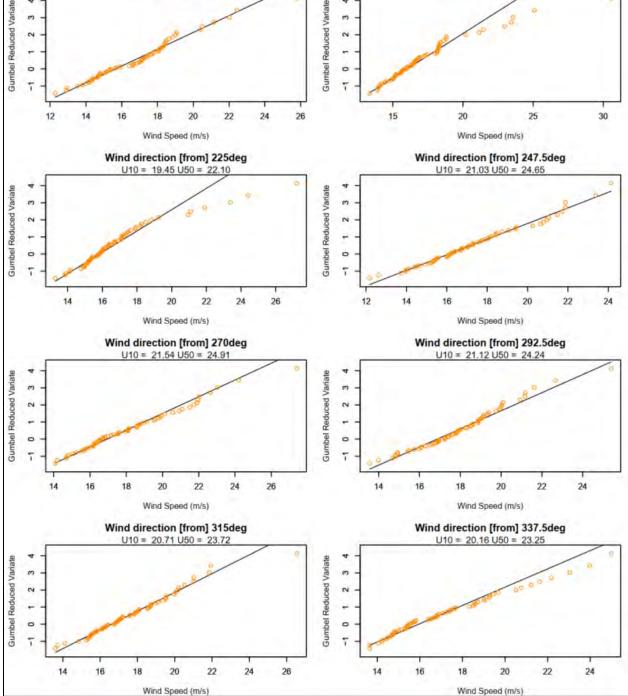


Figure 7: Extreme value analysis on wind data – for Source Point offshore location [1]

The extreme value analysis of the wave heights is presented in Figure 8. Similar to the presentation of the wind data, Hs10 and Hs50 represent the 10 and 50 year return period wave heights, respectively.

Title	Wind and Wave Conditions – Port N	louton – Marine Finfish	n Lease 0835	10-
Revision	В	Date Last Revised	2020-04-21	\approx
DSA Project	CMAR-19EXM	Client Project /	N/A	$\stackrel{\sim}{\sim}$
		Reference		DS



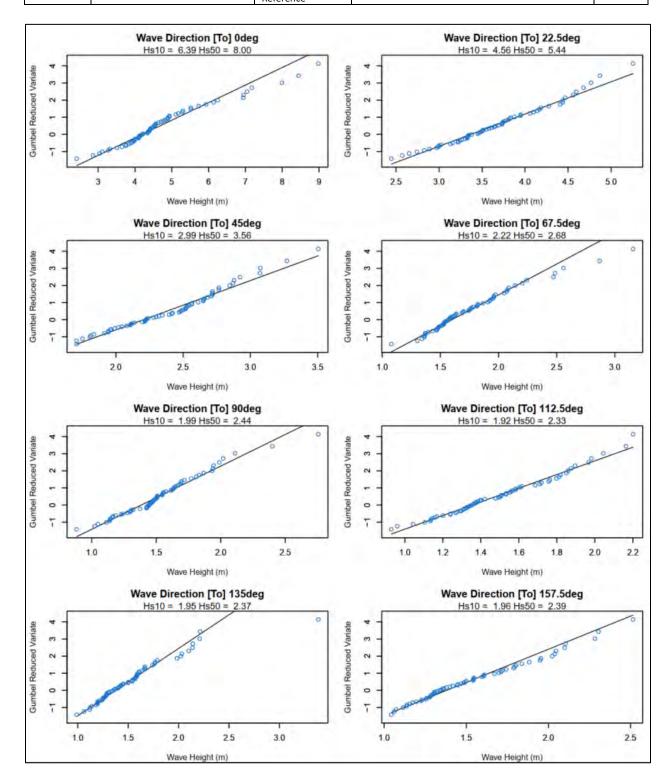

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			le.
Revision	В	Date Last Revised	2020-04-21	80
DSA Project	CMAR-19EXM	Client Project /	N/A	$\mathcal{M}_{\mathcal{K}}$
		Reference		DSA.

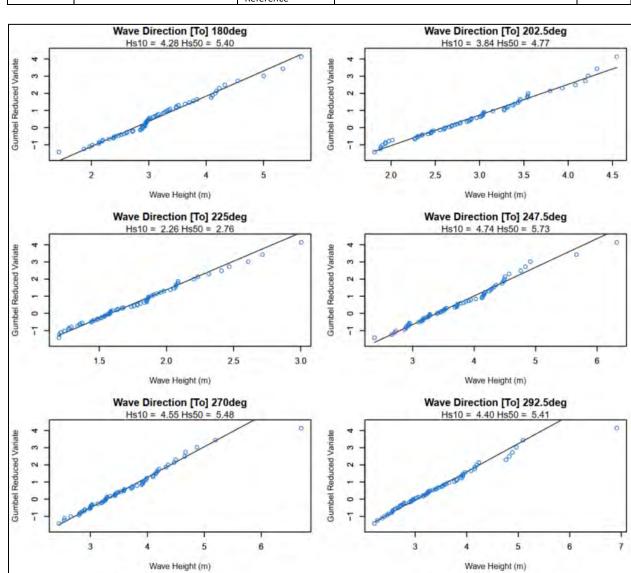


Figure 8: Extreme value analysis on wave data – for Source Point offshore location [1]

6

Gumbel Reduced Variate

2

0

7

Wave Direction [To] 315deg

Hs10 = 4.39 Hs50 = 5.40

4

Wave Height (m)

8

Wave Direction [To] 337.5deg

Hs10 = 6.31 Hs50 = 7.68

Wave Height (m)

5

Gumbel Reduced Variate

2

0

T

2

Title	Wind and Wave Conditions – Port M	1outon – Marine Finfisl	h Lease 0835	100
Revision	В	Date Last Revised	2020-04-21	**
DSA Project	CMAR-19EXM	Client Project /	N/A	XXX
		Reference		DSA.

In summary, the following data was obtained from the extreme value analysis:

Table 1 Results extreme value analysis for wind and waves at the offshore source point location in Figure 4

Directio	n [from] [°]	Uwind,10year [m/s]	Uwind,50year [m/s]	H _{s,10year} [m]	H _{s,50year} [m]
0	N	20.65	24.15	4.28	5.4
23	NNE	21.38	25.5	3.84	4.77
45	NE	21.63	25.62	2.26	2.76
68	ENE	22.77	27.87	4.74	5.73
90	Е	19.36	22.49	4.55	5.48
113	ESE	20.38	23.99	4.4	5.41
135	SE	19.38	22.47	4.39	5.4
158	SSE	20.36	23.97	6.31	7.68
180	S	20.23	23.6	6.39	8
203	SSW	20.34	23.51	4.56	5.44
225	SW	19.45	22.1	2.99	3.56
248	WSW	21.03	24.65	2.22	2.68
270	W	21.54	24.91	1.99	2.44
293	WNW	21.12	24.24	1.92	2.33
315	NW	20.71	23.72	1.95	2.37
338	NNW	20.16	23.25	1.96	2.39

Polar plots for maximum wind speeds and wave heights at 10 year and 50 year return periods are shown in Figure 9 to Figure 12, respectively.

Title	Wind and Wave Conditions – Port N	Nouton – Marine Finfis	h Lease 0835	la.
Revision	В	Date Last Revised	2020-04-21	
DSA Project	CMAR-19EXM	Client Project /	N/A	ŹΒ
		Reference		DSA.



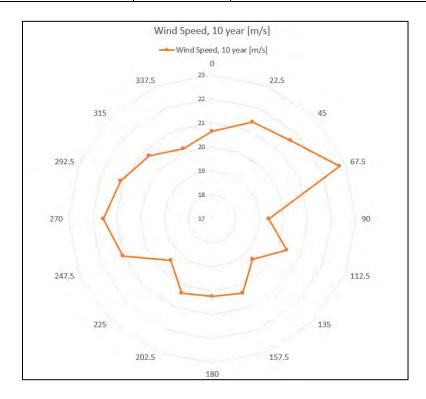


Figure 9 Maximum wind speed at 10 year return period and direction [from]- for Source Point offshore location [1]

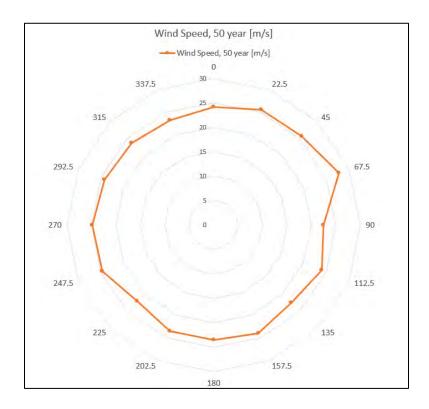


Figure 10 Maximum wind speed at 50 year return period and direction [from]- for Source Point offshore location [1]

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			
Revision	В	Date Last Revised	2020-04-21	
DSA Project	CMAR-19EXM	Client Project /	N/A	
		Reference		



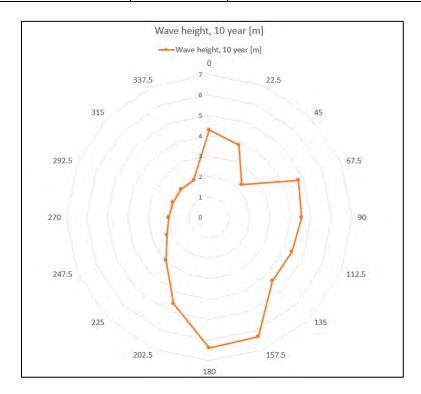


Figure 11 Maximum wave height at 10 year return period and direction [from]- for Source Point offshore location [1]

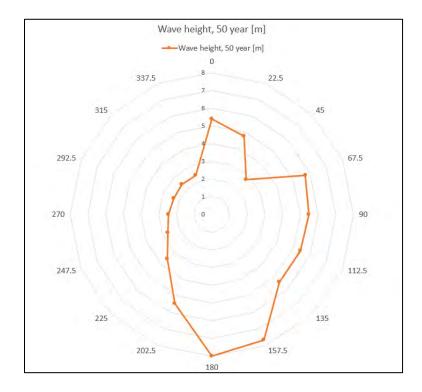


Figure 12 Maximum wave height at 50 year return period and direction [from]- for Source Point offshore location [1]

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			la.
Revision	В	Date Last Revised	2020-04-21	0
DSA Project	CMAR-19EXM	Client Project /	N/A	XXX
		Reference		DSA.

The wave data, presented in Table 1, was set as boundary condition and specified as a JONSWAP spectrum. The peak-enhancement factor was set to 3.3 and directional spreading was included as a $\cos^{m}(\theta)$ distribution.

Only wind-wave interaction was considered. Current-wave interaction was not included because local flow velocities are very small.

Eight headings were used, the wind direction was kept constant within its directional bin. T_p was varied in the presented range as shown in Table 2.

Table 2 Tp values used in analysis.

Directio	n [from] [°]	T _ρ [s]
0	N	4.2_14.83
23	NNE	6.95_12.51
45	NE	3.8_14
68	ENE	8.53_14.15
90	E	8.67_14.07
113	ESE	8.85_14.92
135	SE	8.96_15.61
158	SSE	8.2_16.75
180	S	8.02_16.73
203	SSW	8.2_14.15
225	SW	6.52_14.22
248	WSW	4.13_14.29
270	W	3.81_14.23
293	WNW	3.33_14.23
315	NW	3.37_14.47
338	NNW	3.77_14.65

In this method, wave design conditions for the project location are based on 10 and 50 year return period sea-state and winds for an offshore location, which have subsequently been transferred to the project location. This will provide reasonable design conditions; however, they cannot be linked directly to a return period at the site.

4.4 Wave modeling results

The results of the wave modeling are presented in Figure 13 to Figure 15 for directions from northeast, east, and southeast, respectively for three key wave headings. As stated in the previous section, the wind conditions are assumed to stay constant for the region. The results from STWave represent the maximum significant wave height value at the region including its spectral peak period and wave direction.

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			le.
Revision	В	Date Last Revised	2020-04-21	200
DSA Project	CMAR-19EXM	Client Project /	N/A	XX
		Reference		DSA.

The fish farm site location at the Port Mouton is presented in Figure 1. The estimated wave and wind conditions for the site is shown in the following section.

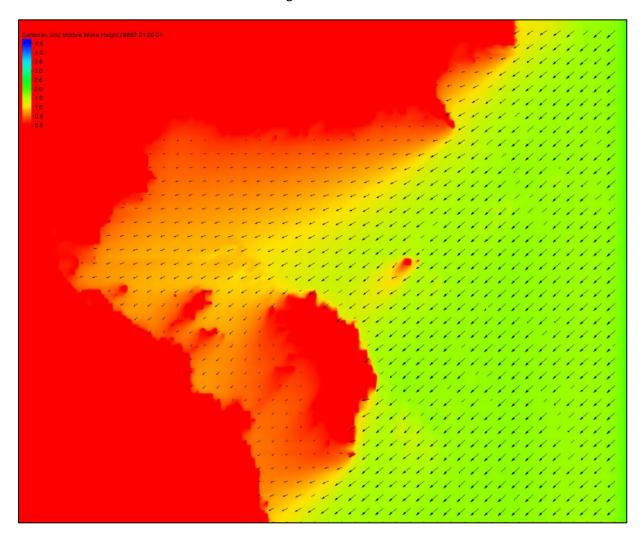


Figure 13 Wave modeling results for direction [From] 45 deg- NE

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			
Revision	B Date Last Revised 2020-04-21			
DSA Project	CMAR-19EXM	Client Project /	N/A	
		Reference		

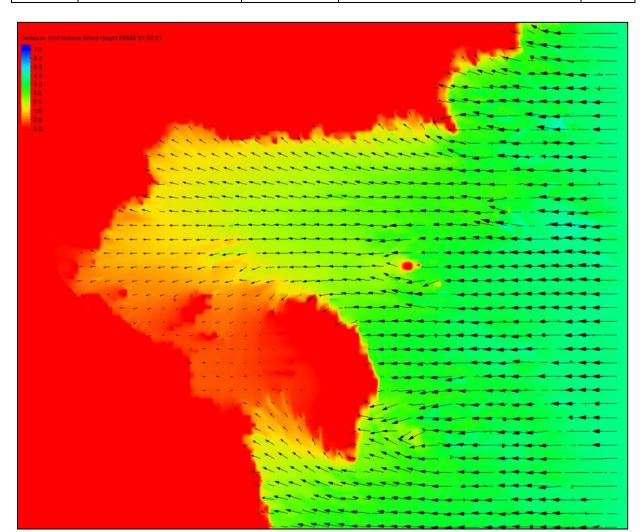


Figure 14 Wave modeling results for direction [From] 90 deg- E

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			1000
Revision	В	2020-04-21	8	
DSA Project	CMAR-19EXM	Client Project /	N/A	$\mathcal{M}_{\mathcal{F}}$
		Reference		DSA.

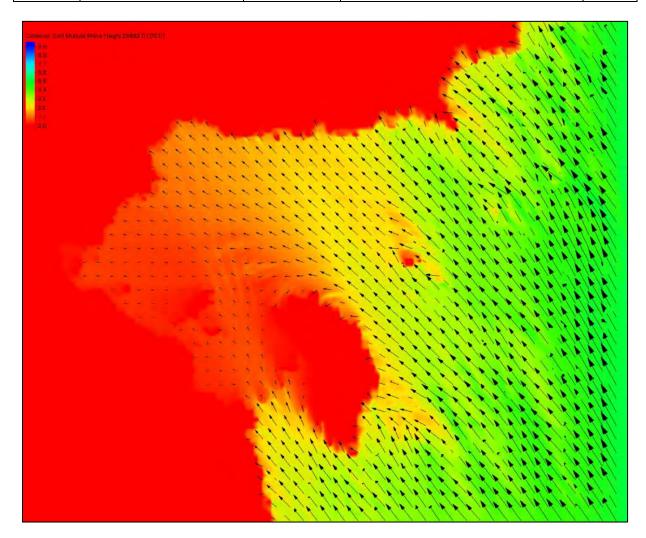


Figure 15 Wave modeling results for direction [From] 158 deg- SE

4.4.1 Wave/wind conditions for Port Mouton- Marine Finfish Lease- 0835

The Estimated wave and wind results from the STWave model, for the Port Mouton- Marine Finfish Lease- 0835, summarized in Table 3. Note that the results in Table 3 indicate significant wave height (Hs) and peak period (T_P) for the selected site. These represent the extreme wave conditions at this coordinate: 43° 54.903'N, 64° 48.727'W.

Table 3 Estimated wave and wind design conditions for Port Mouton- Marine Finfish Lease- 0835

Wave/Wind conditions	Direction [from] [°]		Wind (m/s)	Hs (m)	Tp (s)
10yr wave/wind	0	N	20.65	0.8	2.64
	23	NNE	21.38	0.6	2.62

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835						
Revision	В	Date Last Revised 2020-04-21					
DSA Project	CMAR-19EXM	Client Project /	N/A				
		Reference					



	45	NE	21.63	0.71	3.48
	68	ENE	22.77	0.81	4.85
	90	Е	19.36	0.45	2.45
	113	ESE	20.38	0.13	1.2
	135	SE	19.38	0.2	1.94
	158	SSE	20.36	0.3	1.8
	180	S	20.23	0.32	1.77
	203	SSW	20.34	0.26	1.8
	225	SW	19.45	0.34	2.25
	248	WSW	21.03	0.46	2.1
	270	W	21.54	0.53	2.1
	293	WNW	21.12	0.44	2.3
	315	NW	20.71	0.51	2.23
	338	NNW	20.16	0.62	2.62
	0	N	24.15	0.96	2.8
	23	NNE	25.5	0.72	2.84
	45	NE	25.62	0.85	3.6
	68	ENE	27.87	0.94	4.57
	90	Е	22.49	0.52	2.55
	113	ESE	23.99	0.2	1.37
	135	SE	22.47	0.23	2.1
FOur ways /wind	158	SSE	23.97	0.34	1.9
50yr wave/wind	180	S	23.6	0.38	1.87
	203	SSW	23.51	0.32	1.9
	225	SW	22.1	0.4	2.38
	248	WSW	24.65	0.55	2.25
	270	W	24.91	0.62	2.2
	293	WNW	24.24	0.52	2.44
	315	NW	23.72	0.61	2.37
	338	NNW	23.25	0.74	2.8

It should be noted that the return periods indicated for each wave parameter in Table 3 are representative of the boundary condition used to derive that value, not the value itself. Polar plots for maximum wave heights are presented in Figure 16 and Figure 17.

Title	Wind and Wave Conditions – Port Mouton – Marine Finfish Lease 0835			No.
Revision	В	Date Last Revised	2020-04-21	
DSA Project	CMAR-19EXM	Client Project /	N/A	$\dot{\chi}$
		Reference		DS

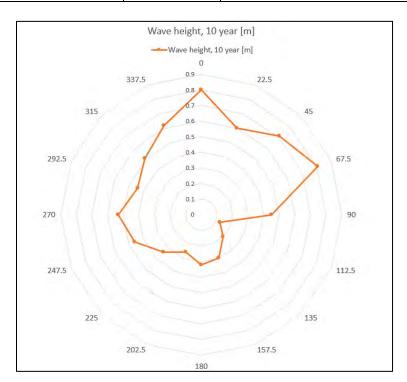


Figure 16 Maximum wave height at 10 year return period and direction [from]- Port Mouton- Marine Finfish Lease- 0835

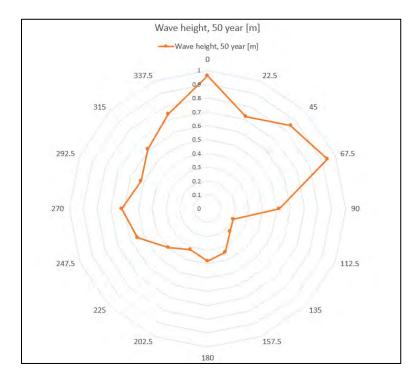


Figure 17 Maximum wave height at 50 year return period and direction [from]- Port Mouton- Marine Finfish Lease- 0835