

2020

WIND AND WAVE CONDITIONS – JORDAN BAY – MARINE FINFISH LEASES 1358, 1359

Prepared by:
Meysam Karimi, PhD, Dean Steinke, P.Eng.
Dynamic Systems Analysis

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359
DSA Document	Report-DSA-CMAR-19EXM-Jordan Bay Wind and Wave Conditions RevB.0.docx
Revision	B
Author	Meysam Karimi, PhD
Co-authors	Dean Steinke, P.Eng
Prepared for	CMAR
Client reference / project	N/A
DSA project	CMAR-19EXM
Last revised	2020-05-05
Pages (incl. Grove Br)	28

DSA Pacific Office


201-754 Broughton St
Victoria, BC V8W 1E1
+1.250.483.7207

DSA Atlantic office

210 – 3600 Kempt Road
Halifax, NS B3K 4X8
+1.902.407.3722


info@dsaocean.com
www.dsaocean.com



Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

Revision history

Revision	Revision description	Date	Summary of changes / additions	Revisions by	Checked by	Approved for release by	Issued to
A	IFR	2020-05-04	Report draft	MEK	DMS	DMS	CMAR
B	IFR	2020-05-05	CMAR comments applied; Approved for public release	MEK	DMS	DMS	CMAR


Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

Executive Summary


In support of Centre for Marine Applied Research (CMAR), the following report presents wind and wave conditions at two locations in Jordan Bay, Nova Scotia, Canada.

In this report, wave and wind conditions are presented for 2 locations:

- Marine Finfish Lease- 1358: 43° 42.175'N, 65° 11.672'W.
- Marine Finfish Lease- 1359: 43° 40.875'N, 65° 12.280'W.

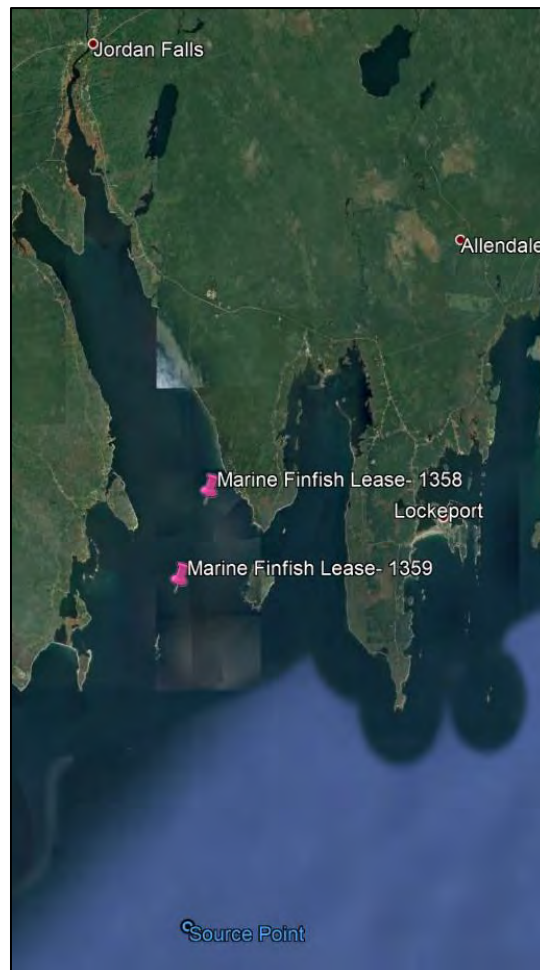

To determine the wave field evolution closer to shore at a specific site, and to determine more accurate 10 and 50 year return period wave data, near shore wave modelling can be used. For the Jordan Bay area, STWave was used to model the nearshore wave conditions. The results showed reduced wave heights, in comparison to the source point, due to depth induced energy dissipation (bottom friction, breaking). The STWave model results are determined using wind and wave boundary condition data from the MSC50 HindCast model of a nearby offshore location. The extreme wave conditions at the locations are determined in part by propagating wave from the offshore hindcast model location into the site of interest.

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

Contents

Revision history	2
Executive Summary	3
Contents	4
Figures	4
Tables	5
1 Introduction	6
1.1 Overview	6
1.2 Objective(s)	7
2 Abbreviations and acronyms	7
3 Reference documents and drawings	8
4 Wave conditions	8
4.1 Overview	8
4.2 Wave Model Description	9
4.3 Boundary conditions – offshore wind and wave conditions	10
4.4 Wave modeling results	20
4.4.1 Wave/wind conditions for Jordan Bay- Marine Finfish Lease- 1358	23
4.4.2 Wave/wind conditions for Jordan Bay- Marine Finfish Lease- 1359	26

Figures

Figure 1 Two (2) site locations at Jordan Bay [4]	6
Figure 2 Jordan Bay, Nova Scotia, Canada	7
Figure 3 Bathymetry at site on hydrographic charts- Depth reported in meters	9
Figure 4 Bathymetry at site on STWave. Note the MSC50 HindCast model source point indicated at 43° 36.000'N, 65° 12.000'W	10
Figure 5 Wave height versus wave direction plot for the source point	11
Figure 6 Wind speed versus wind direction plot for the source point	12
Figure 7: Extreme value analysis on wind data – for Source Point offshore location [1]	14
Figure 8: Extreme value analysis on wave data – for Source Point offshore location [1]	16
Figure 9 Maximum wind speed at 10 year return period and direction [from]- for Source Point offshore location [1]	17
Figure 10 Maximum wind speed at 50 year return period and direction [from]- for Source Point offshore location [1]	18



Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

Figure 11 Maximum wave height at 10 year return period and direction [from]- for Source Point offshore location [1]	18
Figure 12 Maximum wave height at 50 year return period and direction [from]- for Source Point offshore location [1]	19
Figure 13 Wave modeling results for direction [From] 158 deg- SE	21
Figure 14 Wave modeling results for direction [From] 180 deg- S	22
Figure 15 Wave modeling results for direction [From] 203 deg- SW	23
Figure 16 Maximum wave height at 10 year return period and direction [from]- Jordan Bay- Marine Finfish Lease- 1358.....	25
Figure 17 Maximum wave height at 50 year return period and direction [from]- Jordan Bay- Marine Finfish Lease- 1358.....	26
Figure 18 Maximum wave height at 10 year return period and direction [from]- Jordan Bay- Marine Finfish Lease- 1359.....	28
Figure 19 Maximum wave height at 50 year return period and direction [from]- Jordan Bay- Marine Finfish Lease- 1359.....	28

Tables

Table 1 Results extreme value analysis for wind and waves at the offshore source point location in Figure 4	17
Table 2 T_p values used in analysis.	19
Table 3 Estimated wave and wind design conditions for Jordan Bay- Marine Finfish Lease- 1358	24
Table 4 Estimated wave and wind design conditions for Jordan Bay- Marine Finfish Lease- 1359	26

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

1 Introduction

1.1 Overview

For the locations in Jordan Bay shown in Figure 1, wind and wave conditions have been estimated. The following presents data on the predicted 10 and 50 year wind and wave conditions at these locations.

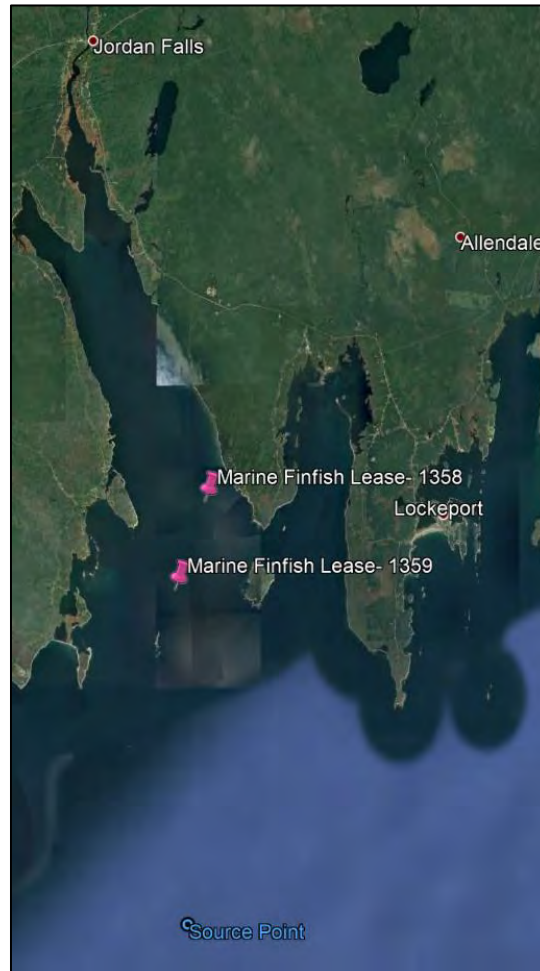



Figure 1 Two (2) site locations at Jordan Bay [4]

Jordan Bay is overall protected from offshore waves by surrounding lands, but is vulnerable to waves from south and southeast which will travel directly into the bay, as can be seen in Figure 2. These waves are expected to lose energy by travelling into shallower waters. Detailed wave modelling is required to determine the amount of energy lost and wave height reduction.

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

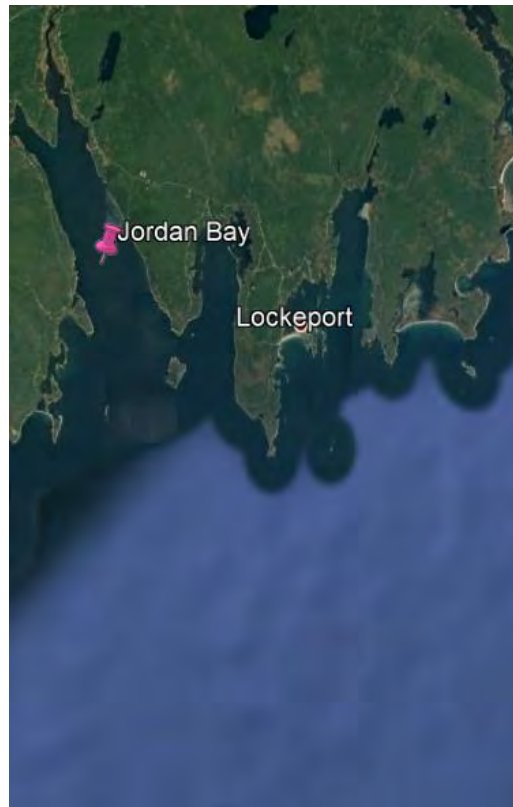


Figure 2 Jordan Bay, Nova Scotia, Canada


The context of this project is that extreme wind and wave conditions are needed to select engineering load cases for those wishing to install finfish or shellfish farms in the area. For example, extreme environmental conditions with minimum 10-year and 50-year return periods are required for the design of a marine fish farm site, as per guidance in the Scottish technical standard [2] and NS9415 [3]. While the locations assessed as part of this modeling exercise are actual aquaculture site locations, the data produced for these locations is useful for understanding the approximate wave climate in the region and can be used to evaluate any proposals for sites in the area. Understanding the wind and wave climates at aquaculture sites is important for mitigating risks.

1.2 Objective(s)

- Determine wave/wind conditions at two locations in Jordan Bay and find the conditions with 10 and 50 year return periods.

2 Abbreviations and acronyms

DSA	Dynamic Systems Analysis Ltd.
SMS	Surface-water Modeling System
CMAR	Centre for Marine Applied Research
CHS	Canadian Hydrographic Services

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	


3 Reference documents and drawings

[1]	V. Swail, V. Cardone, M. Ferguson, D. Gummer, E. Harris, E. Orelup, and A. Cox, “The msc50 wind and wave reanalysis,” in <i>9th International Workshop On Wave Hindcasting and Forecasting</i> , 2006.
[2]	Marine Scotland. (2015). A Technical Standard for Scottish Finfish Aquaculture. Ministerial Group for Sustainable Aquaculture's Scottish Technical Standard Steering Group
[3]	Norge, S. (2009). Norwegian Standard NS 9415. E: 2009. Marine Fish Farms—Requirements for Site Survey, Risk Analyses, Design, Dimensioning, Production, Installation and Operation. <i>Standard Norge, Lysaker</i> .
[4]	CMAR approved sites -RevB.kmz

4 Wave conditions

4.1 Overview

SMS version 12.2.13 was used to setup the bathymetric and computational grid. This section provides a description of the grid size, mesh size and offshore environmental conditions. Site bathymetry is provided in Figure 3. Note that a CHS hydrographic chart is used to generate the bathymetric data for wave modeling.

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

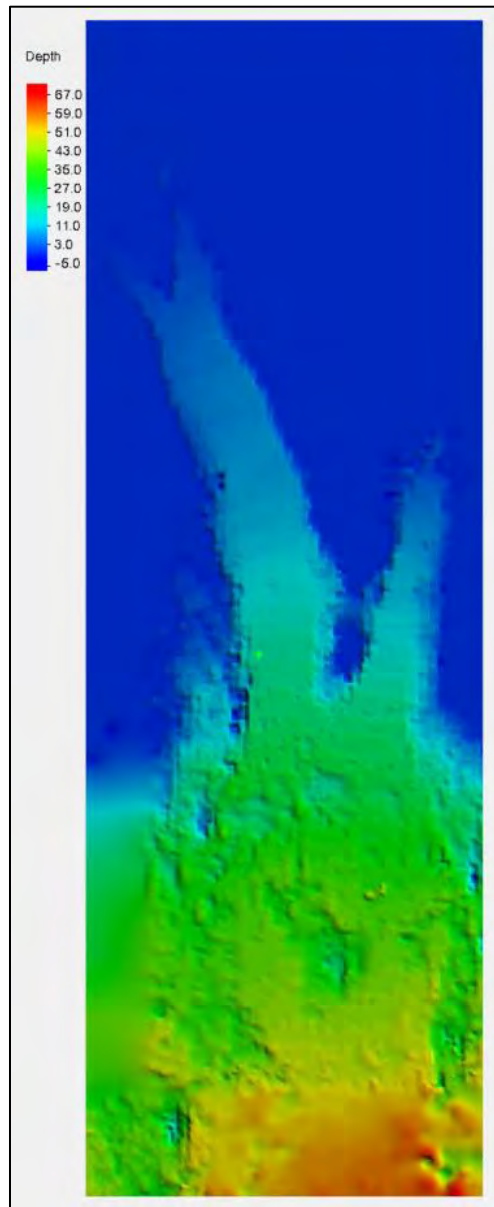



Figure 3 Bathymetry at site on hydrographic charts- Depth reported in meters

4.2 Wave Model Description

SMS, created by Aquaveo, is a modelling suite in which various water surface modelling tools, like wave and flow models, can be used. For this analysis SMS in combination with STWave is used. STWave is a nearshore spectral Hydraulics model, developed by U.S. Army Engineer Research and Development Center (ERDC) and Coastal and Hydraulics Laboratory (CHL). It is capable of modelling accurately wave transformation and propagation.

Two grids were setup, computational grid and spectral grid. The computational grid and its mesh sizes are mainly defined by the bathymetry. The bathymetry in SMS is presented in Figure 4. For this analysis

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

the computational grid size was 28.9km x 9.7km. The mesh size was 15m x 15m, resulting in 1932 x 651= 1,257,732 grid cells.

The spectral domain was divided into 72 directions and 50 frequencies, with a minimum frequency of 0.03Hz and a maximum frequency of 1.01Hz.

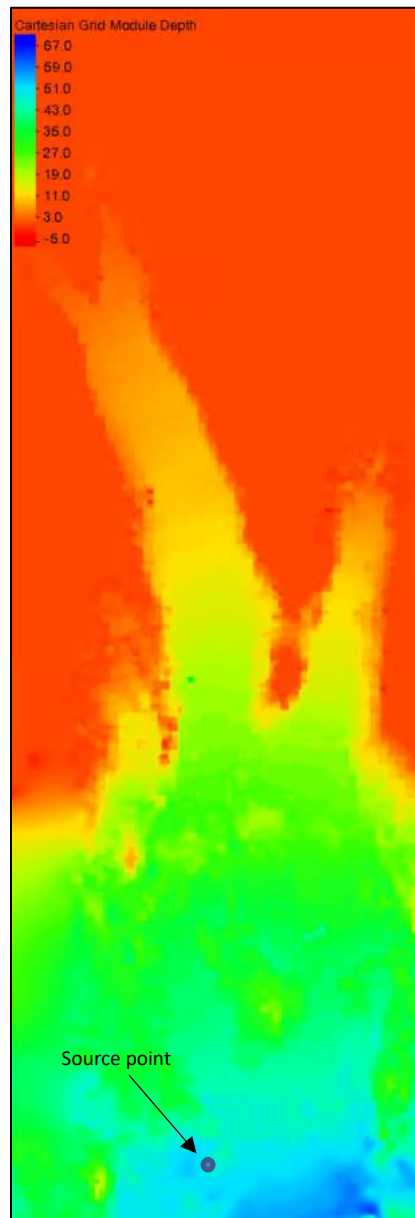



Figure 4 Bathymetry at site on STWave. Note the MSC50 HindCast model source point indicated at 43° 36.000'N, 65° 12.000'W

4.3 Boundary conditions – offshore wind and wave conditions

The MSC50 HindCast model [1] data from location 43° 36.000'N, 65° 12.000'W was used to determine the 10 and 50 year return periods for wind and wave of the Jordan Bay reference sites; the location is

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

labelled as the “Source point” in Figure 4. The scatterplot of wave heights versus wave directions for the source point is shown in Figure 5. The scatter plot of wind speeds versus wind directions for the source point is also shown in Figure 6. Extreme waves and wind at the source point appear to originate more frequently from the south, and southeast.

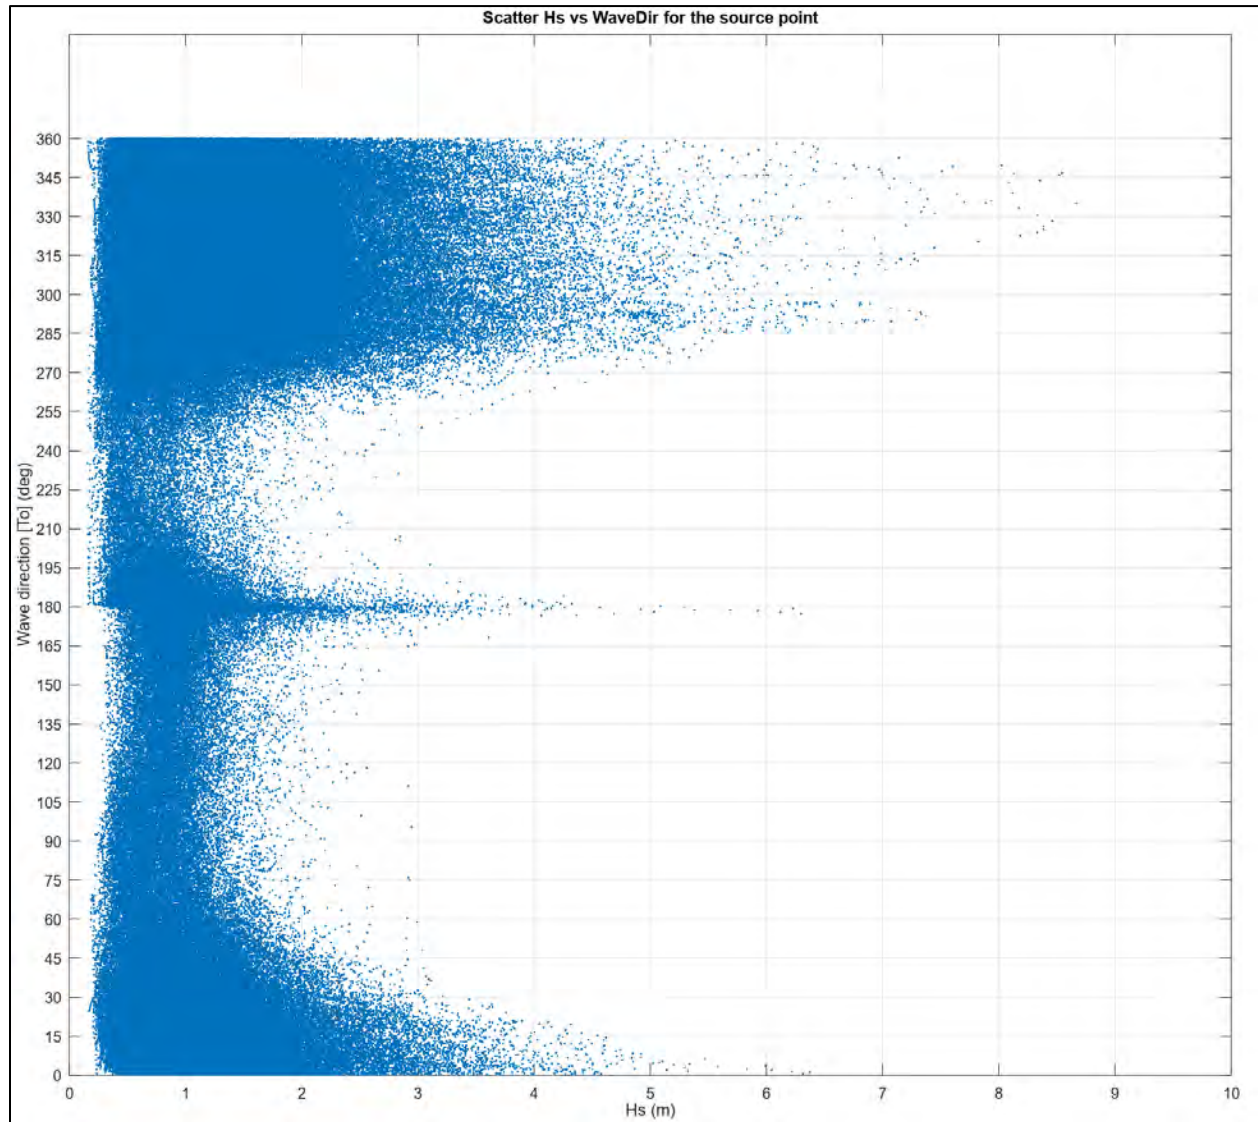



Figure 5 Wave height versus wave direction plot for the source point

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	





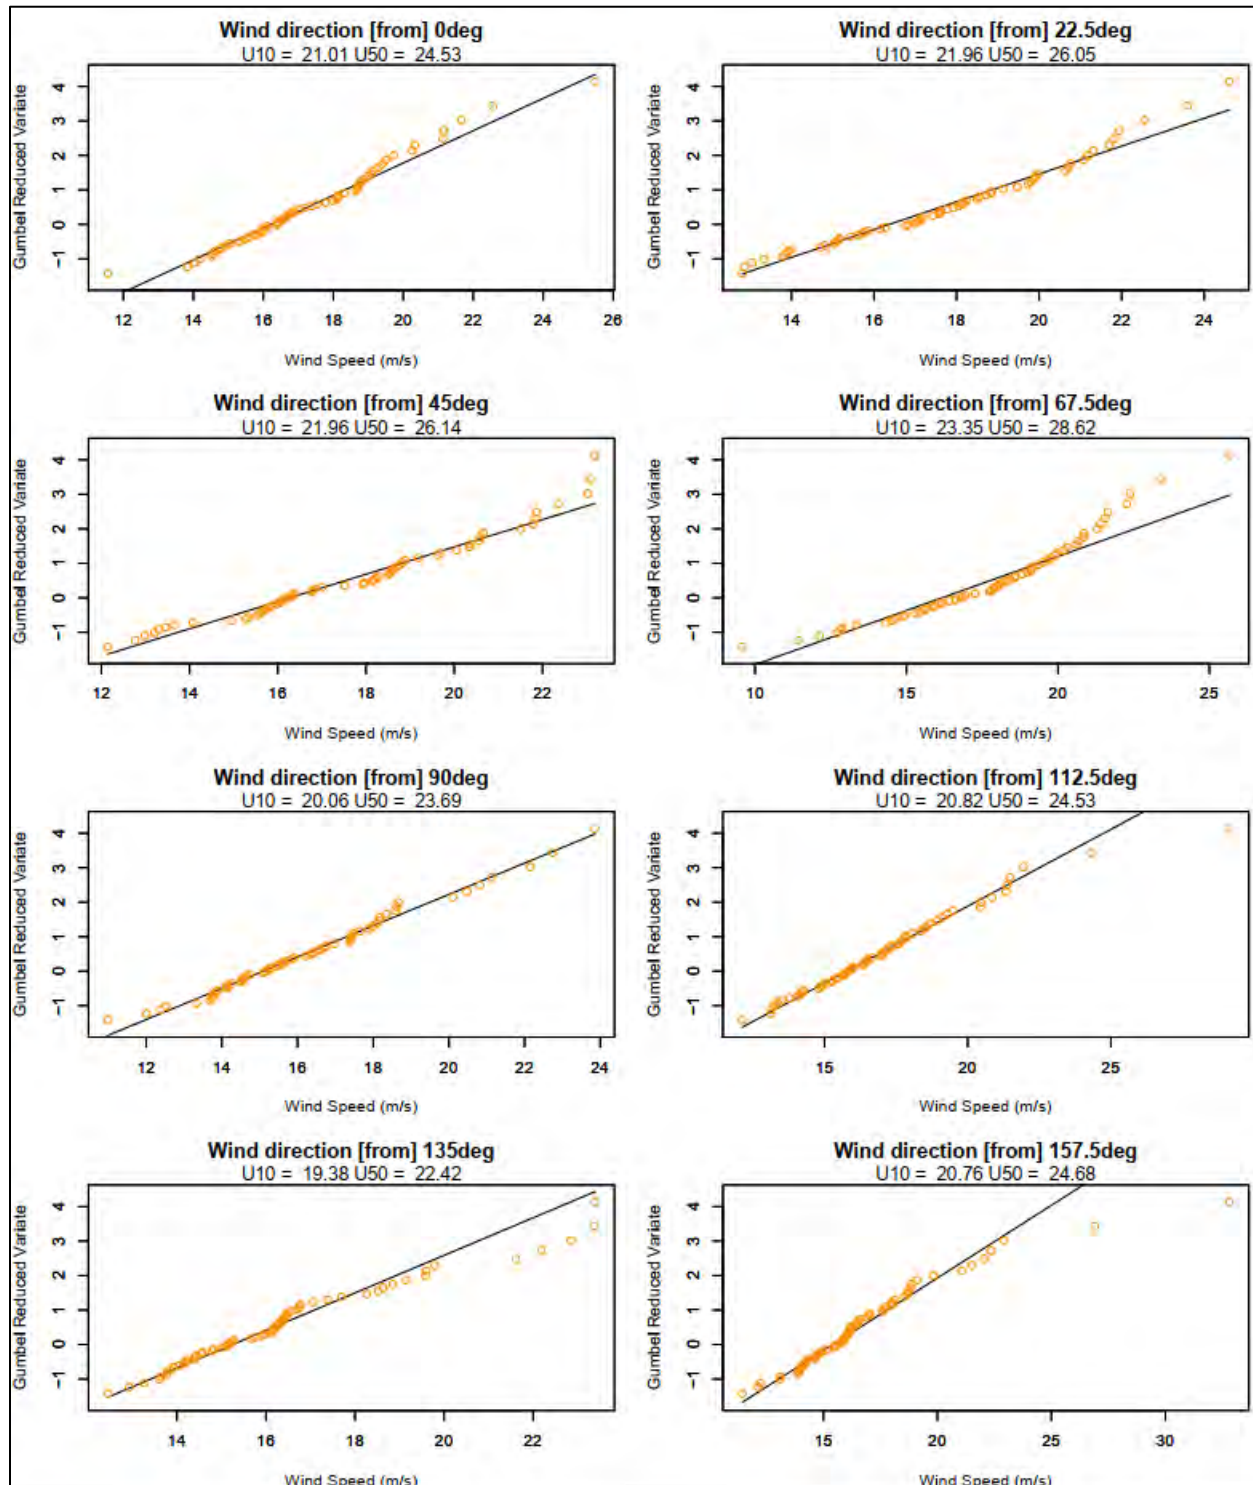
Figure 6 Wind speed versus wind direction plot for the source point


10 and 50 year return period conditions are in general achieved by:

- Obtaining measured or hindcast data for parameter in question
- For each parameter, bin data by direction
- Perform extreme value analysis.
 - Extract annual maxima
 - Fit Gumbel or Weibull distribution to this data
 - Use fitted distribution to calculate values corresponding to 10 and 50 year return period

The extreme value analysis of the wind velocities is presented in Figure 7. U10 and U50 represent the 10 and 50 year return period wind velocities, respectively.

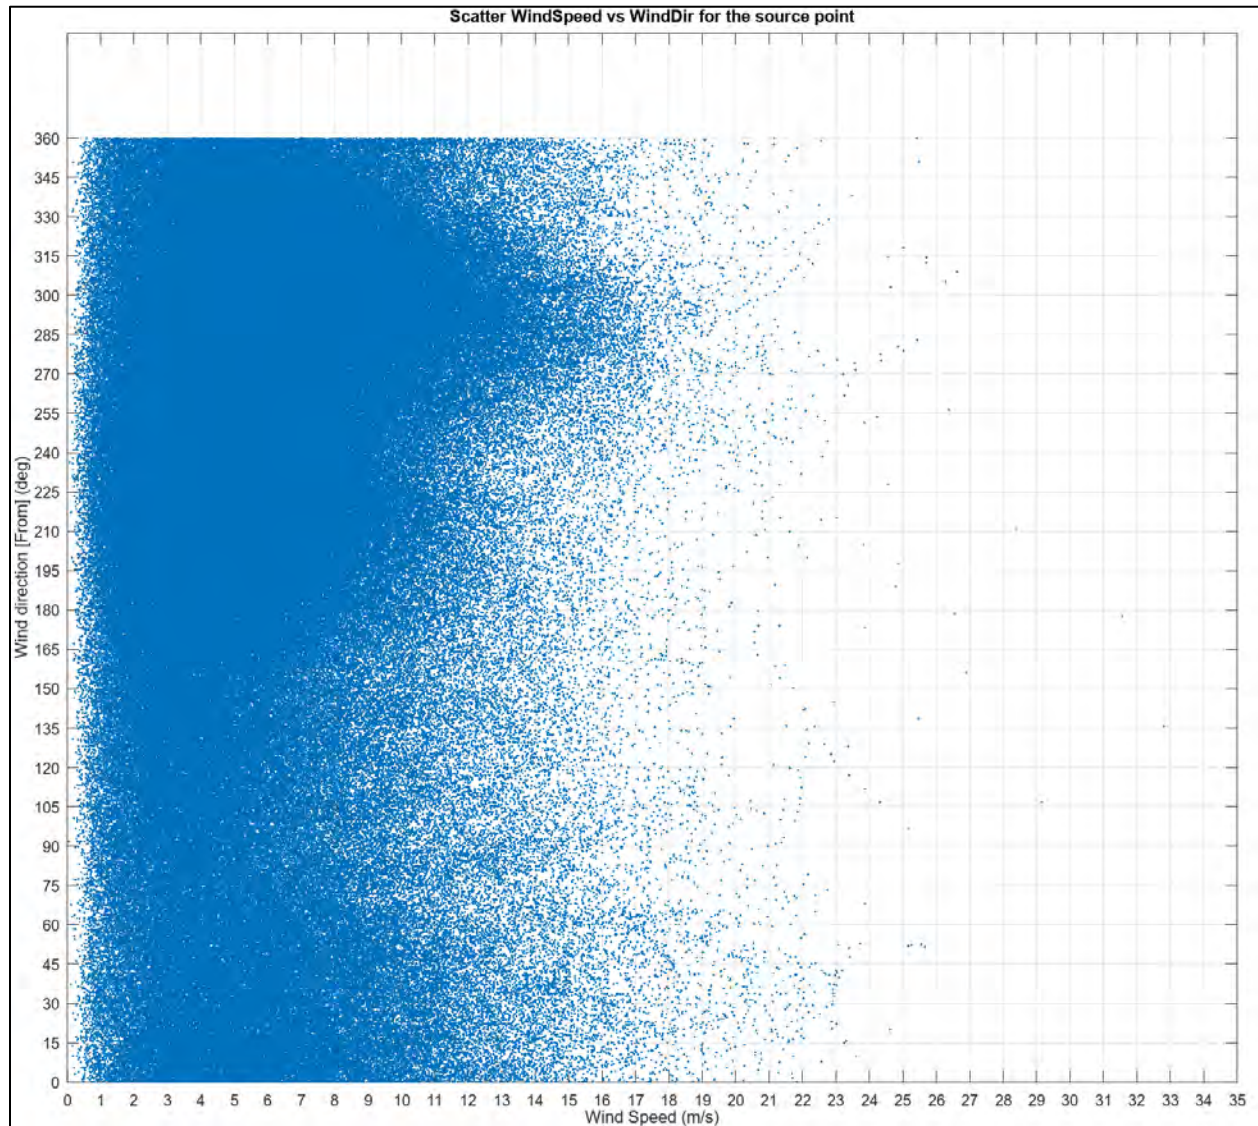Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	



Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

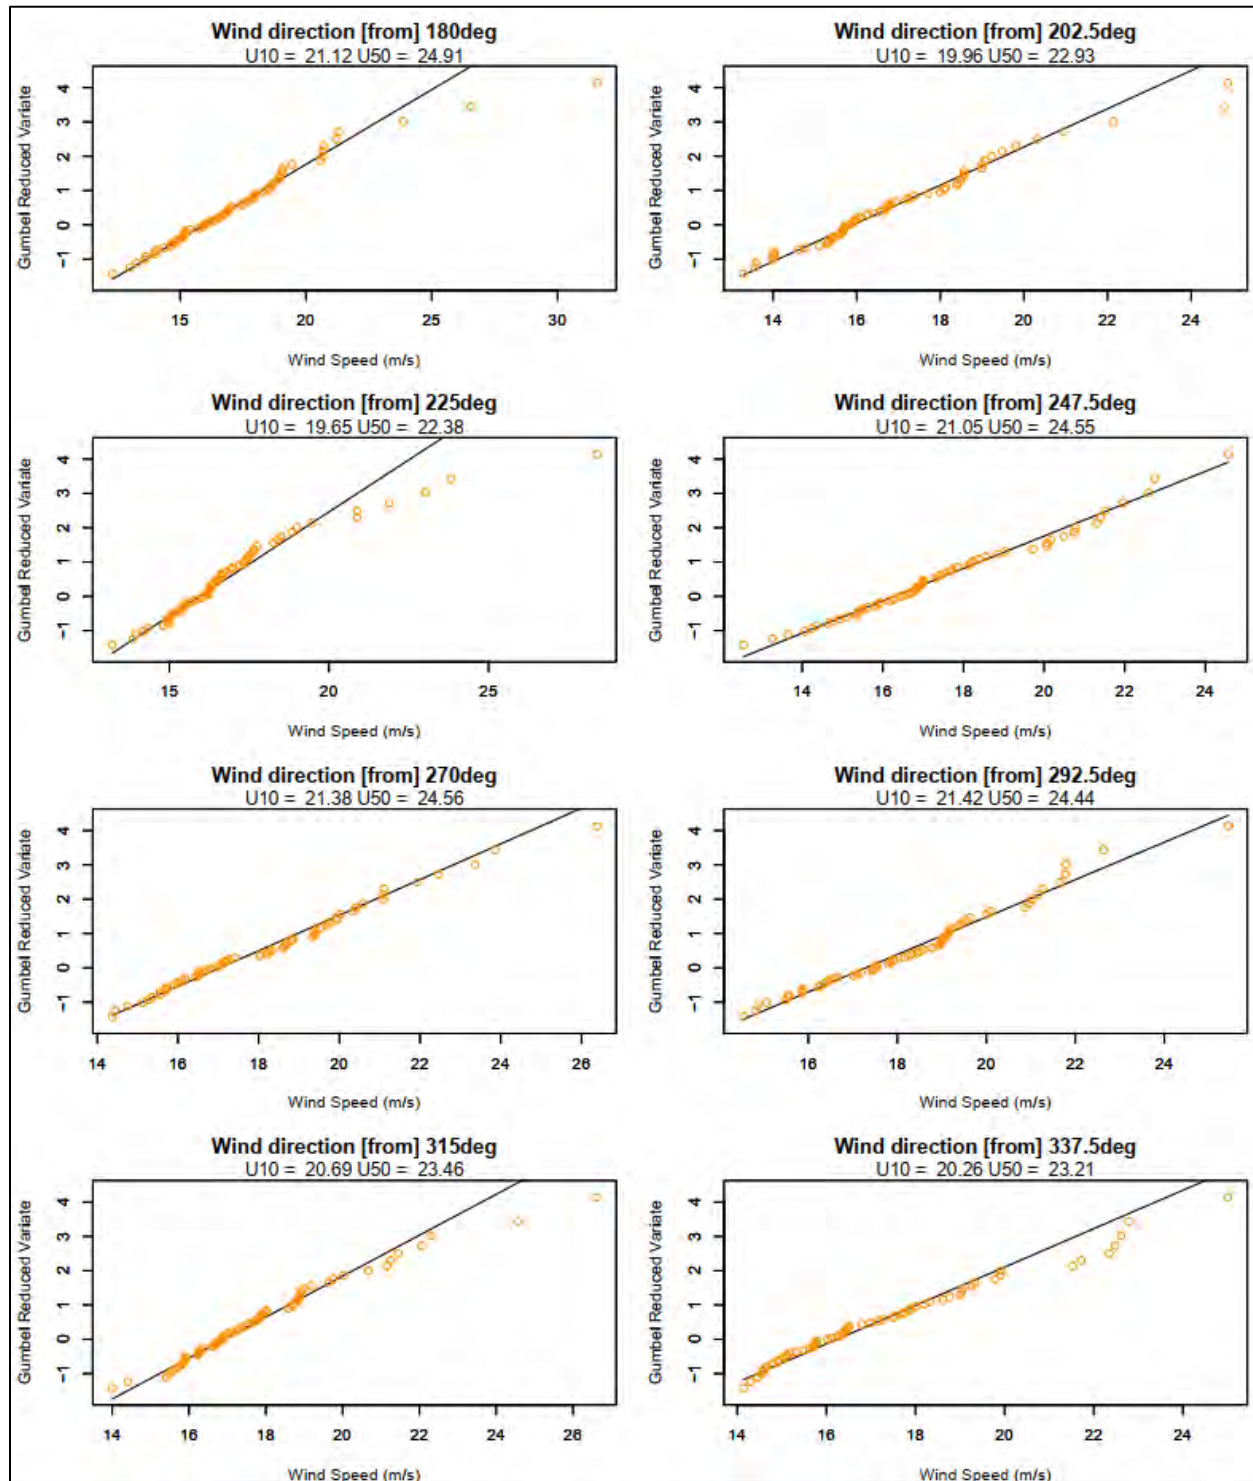

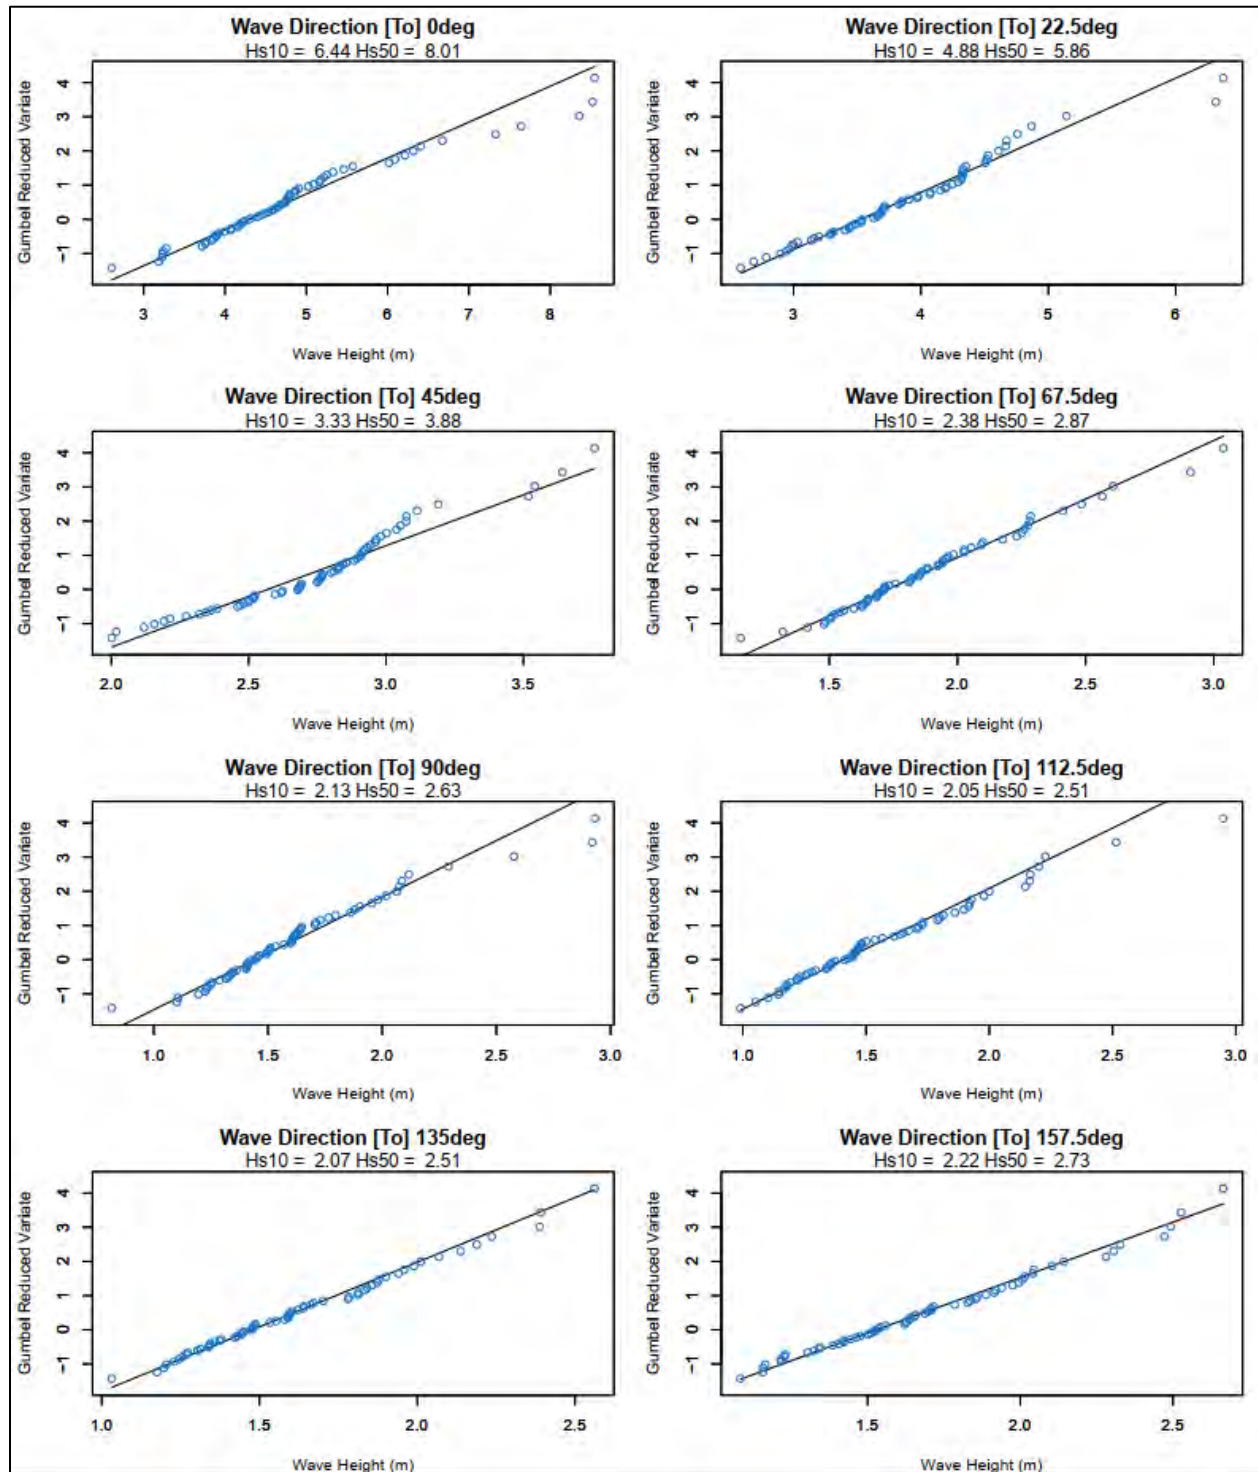



Figure 7: Extreme value analysis on wind data – for Source Point offshore location [1]

The extreme value analysis of the wave heights is presented in Figure 8. Similar to the presentation of the wind data, Hs10 and Hs50 represent the 10 and 50 year return period wave heights, respectively.

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	



Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

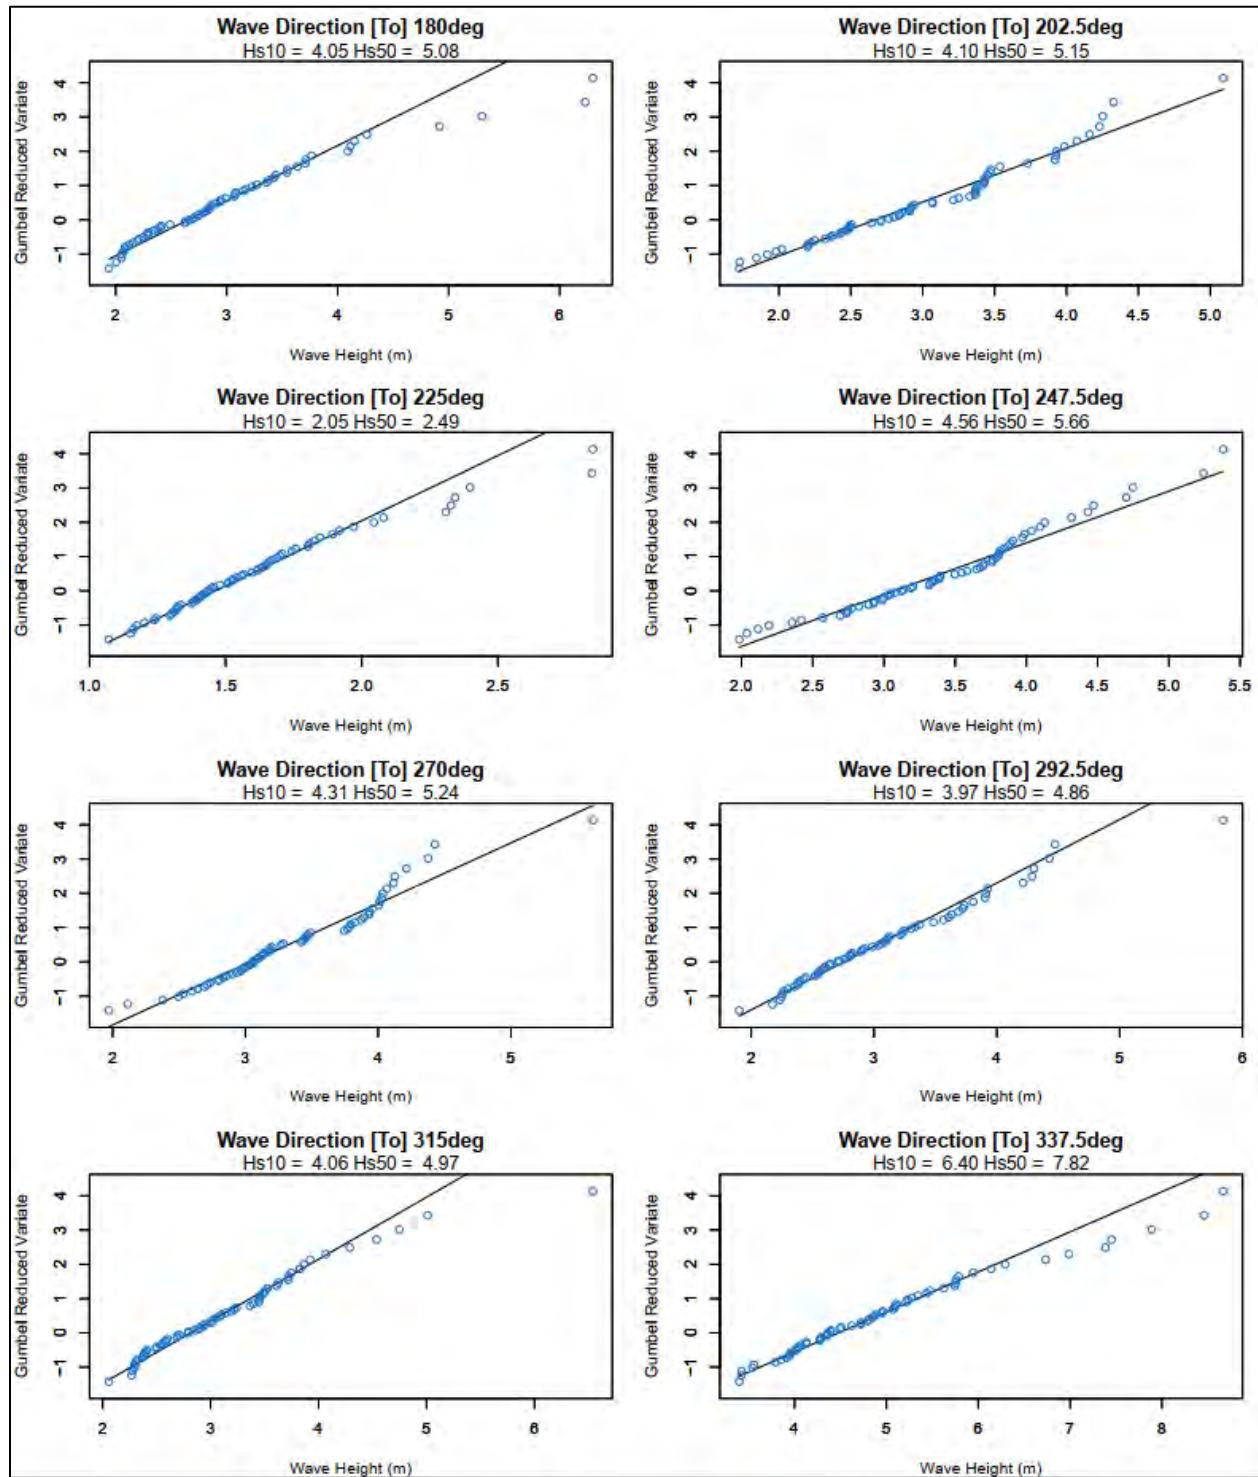


Figure 8: Extreme value analysis on wave data – for Source Point offshore location [1]

In summary, the following data was obtained from the extreme value analysis:


Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

Table 1 Results extreme value analysis for wind and waves at the offshore source point location in Figure 4

Direction [from] [°]		$U_{wind,10year}$ [m/s]	$U_{wind,50year}$ [m/s]	$H_{s,10year}$ [m]	$H_{s,50year}$ [m]
0	N	21.01	24.53	4.05	5.08
23	NNE	21.96	26.05	4.1	5.15
45	NE	21.96	26.14	2.05	2.49
68	ENE	23.35	28.62	4.56	5.66
90	E	20.06	23.69	4.31	5.24
113	ESE	20.82	24.53	3.97	4.86
135	SE	19.38	22.42	4.06	4.97
158	SSE	20.76	24.68	6.4	7.82
180	S	21.12	24.91	6.44	8.01
203	SSW	19.96	22.93	4.88	5.86
225	SW	19.65	22.38	3.33	3.88
248	WSW	21.05	24.55	2.38	2.87
270	W	21.38	24.56	2.13	2.63
293	WNW	21.42	24.44	2.05	2.51
315	NW	20.69	23.46	2.07	2.51
338	NNW	20.26	23.21	2.22	2.73

Polar plots for maximum wind speeds and wave heights at 10 year and 50 year return periods are shown in Figure 9 to Figure 12, respectively.

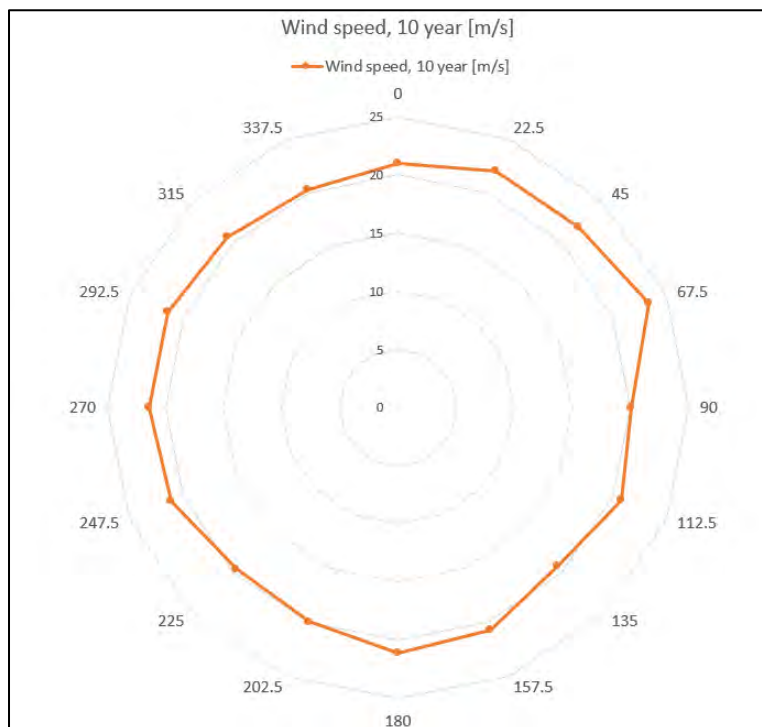



Figure 9 Maximum wind speed at 10 year return period and direction [from]- for Source Point offshore location [1]

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

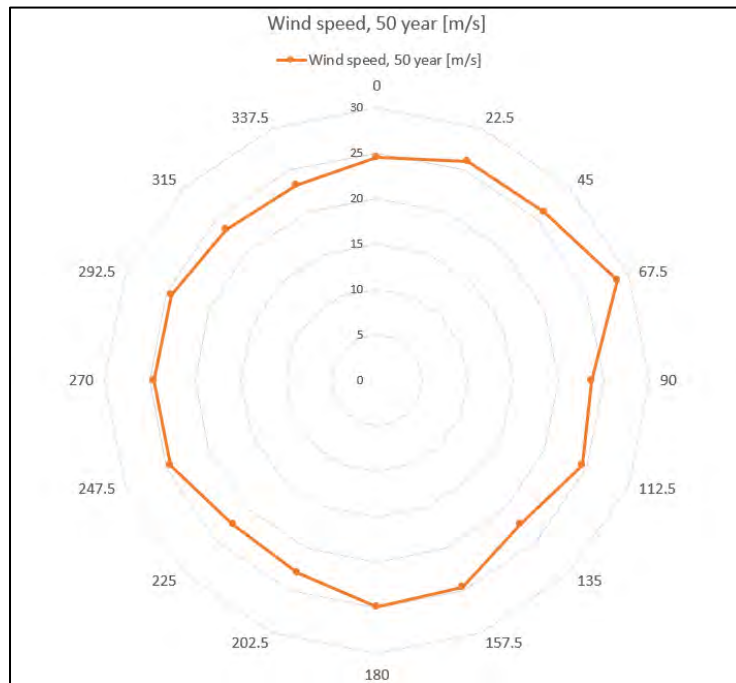


Figure 10 Maximum wind speed at 50 year return period and direction [from]- for Source Point offshore location [1]

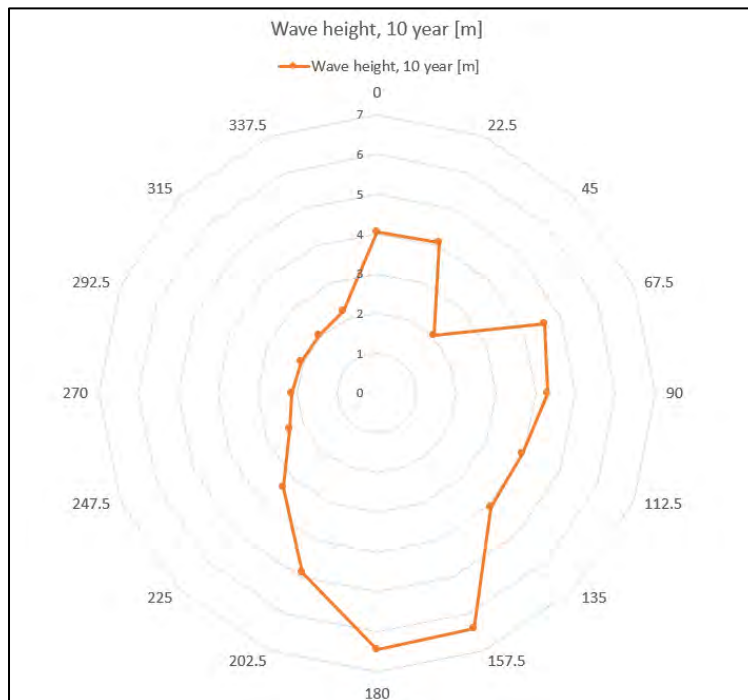



Figure 11 Maximum wave height at 10 year return period and direction [from]- for Source Point offshore location [1]

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

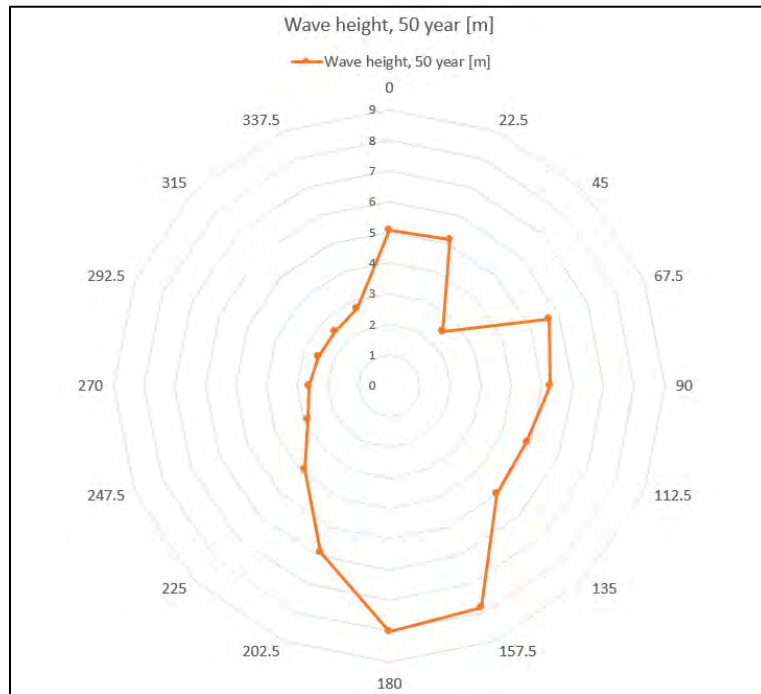


Figure 12 Maximum wave height at 50 year return period and direction [from]- for Source Point offshore location [1]


The wave data, presented in Table 1, was set as boundary condition and specified as a JONSWAP spectrum. The peak-enhancement factor was set to 3.3 and directional spreading was included as a $\cos^m(\theta)$ distribution.

Only wind-wave interaction was considered. Current-wave interaction was not included because local flow velocities are very small.

Eight headings were used, the wind direction was kept constant within its directional bin. T_p was varied in the presented range as shown in Table 2.

Table 2 T_p values used in analysis.

Direction [from] [°]		T_p [s]
0	N	8.8_15.5
23	NNE	6.6_12.1
45	NE	3.8_14.4
68	ENE	8.25_14.3
90	E	8.55_14.31
113	ESE	9.03_14.3
135	SE	8.84_15.55
158	SSE	8.1_15.6
180	S	7.5_15.6
203	SSW	7.8_13.7

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	


225	SW	7.6_13
248	WSW	5.4_14.21
270	W	4_14.22
293	WNW	3.6_14.55
315	NW	4.01_14.62
338	NNW	3.74_14.8

In this method, wave design conditions for the project location are based on 10 and 50 year return period sea-state and winds for an offshore location, which have subsequently been transferred to the project location. This will provide reasonable design conditions; however, they cannot be linked directly to a return period at the site.

4.4 Wave modeling results

The results of the wave modeling are presented in Figure 13 to Figure 15 for directions from southeast, south, and southwest, respectively for three key wave headings with the highest wave heights. As stated in the previous section, the wind conditions are assumed to stay constant for the region. The results from STWave represent the maximum significant wave height value at the region including its spectral peak period and wave direction.

The location of sites at the Jordan Bay are presented in Figure 1. The estimated wave and wind conditions for each site based on the STWave modeling are presented in the following sections.

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

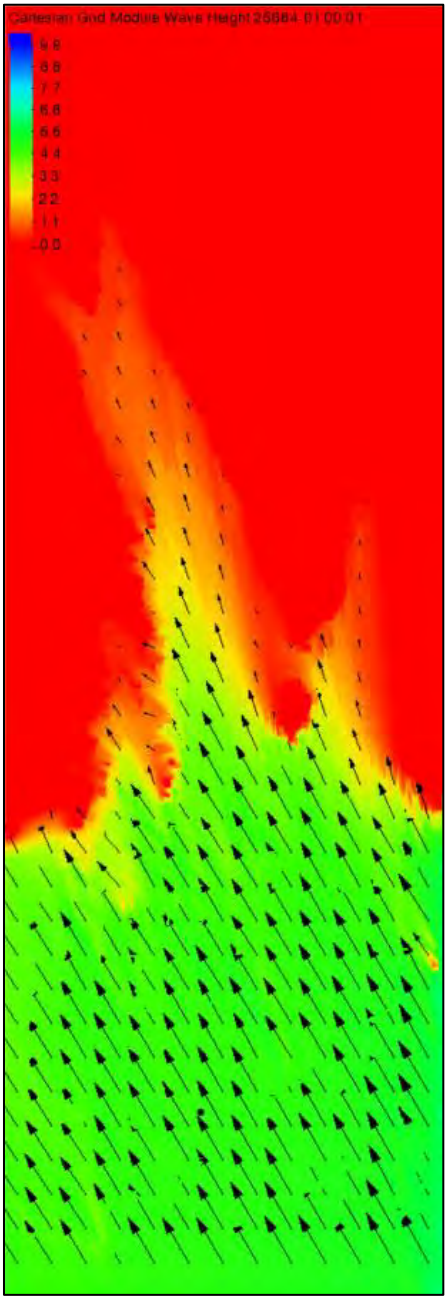



Figure 13 Wave modeling results for direction [From] 158 deg- SE

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

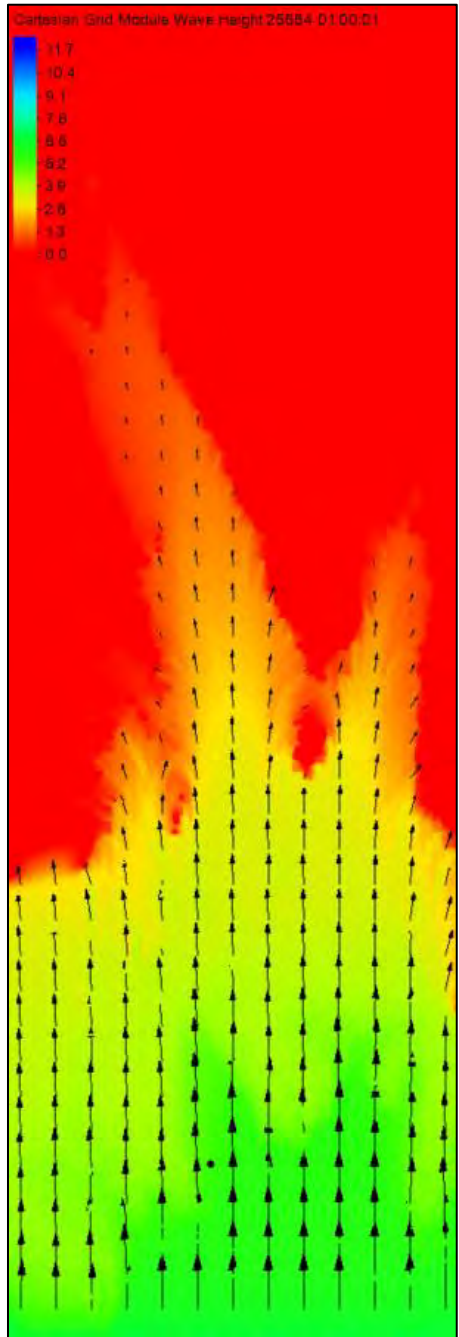



Figure 14 Wave modeling results for direction [From] 180 deg- S

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

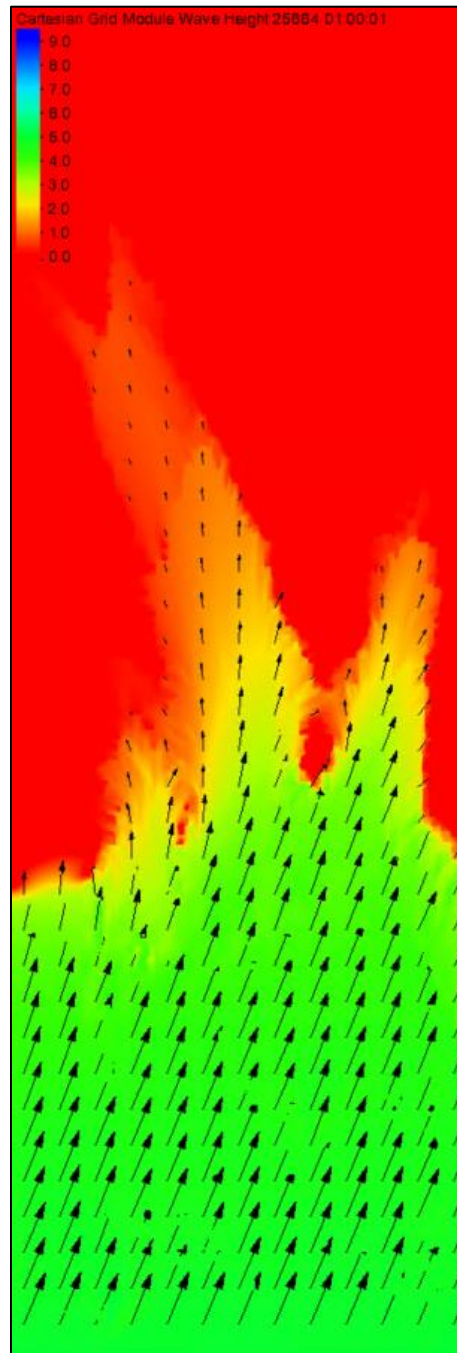


Figure 15 Wave modeling results for direction [From] 203 deg- SW

4.4.1 Wave/wind conditions for Jordan Bay- Marine Finfish Lease- 1358

The wave and wind results from the STWave model, for the Jordan Bay- Marine Finfish Lease- 1358, are summarized in Table 3. Note that the results in Table 3 indicate significant wave height (H_s) and peak period (T_p) for the selected site. These represent the extreme wave conditions at this coordinate: 43° 42.175'N, 65° 11.672'W.



Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

Table 3 Estimated wave and wind design conditions for Jordan Bay- Marine Finfish Lease- 1358

Wave/Wind conditions	Direction [from] [°]		Wind (m/s)	Hs (m)	Tp (s)
10yr wave/wind	0	N	21.01	0.66	2.44
	23	NNE	21.96	0.35	1.86
	45	NE	21.96	0.4	2.15
	68	ENE	23.35	0.46	2.1
	90	E	20.06	0.43	1.92
	113	ESE	20.82	0.4	1.98
	135	SE	19.38	0.58	3.62
	158	SSE	20.76	1.33	4.53
	180	S	21.12	2.74	13.3
	203	SSW	19.96	1.95	6.01
	225	SW	19.65	0.72	2.45
	248	WSW	21.05	0.61	2.3
	270	W	21.38	0.6	2.25
	293	WNW	21.42	0.51	2.25
	315	NW	20.69	0.73	2.74
	338	NNW	20.26	0.88	2.7
50yr wave/wind	0	N	24.53	0.8	2.6
	23	NNE	26.05	0.44	1.98
	45	NE	26.14	0.48	2.32
	68	ENE	28.62	0.58	2.25
	90	E	23.69	0.52	2.1
	113	ESE	24.53	0.47	2.13
	135	SE	22.42	0.66	3.81
	158	SSE	24.68	1.46	4.5
	180	S	24.91	3.42	13.12
	203	SSW	22.93	2.3	10.1
	225	SW	22.38	0.83	2.59
	248	WSW	24.55	0.72	2.44
	270	W	24.56	0.7	2.38
	293	WNW	24.44	0.6	2.4
	315	NW	23.46	0.84	2.89
	338	NNW	23.21	1.02	2.85

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

It should be noted that the return periods indicated for each wave parameter in Table 3 are representative of the boundary condition used to derive that value, not the value itself. Polar plots for maximum wave heights are presented in Figure 16 and Figure 17.

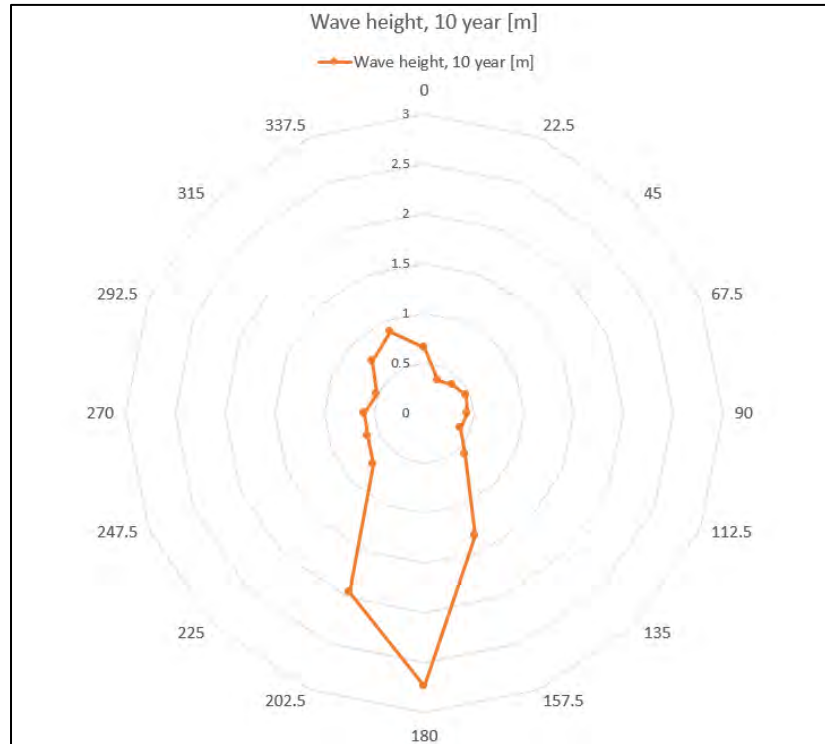



Figure 16 Maximum wave height at 10 year return period and direction [from]- Jordan Bay- Marine Finfish Lease- 1358

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

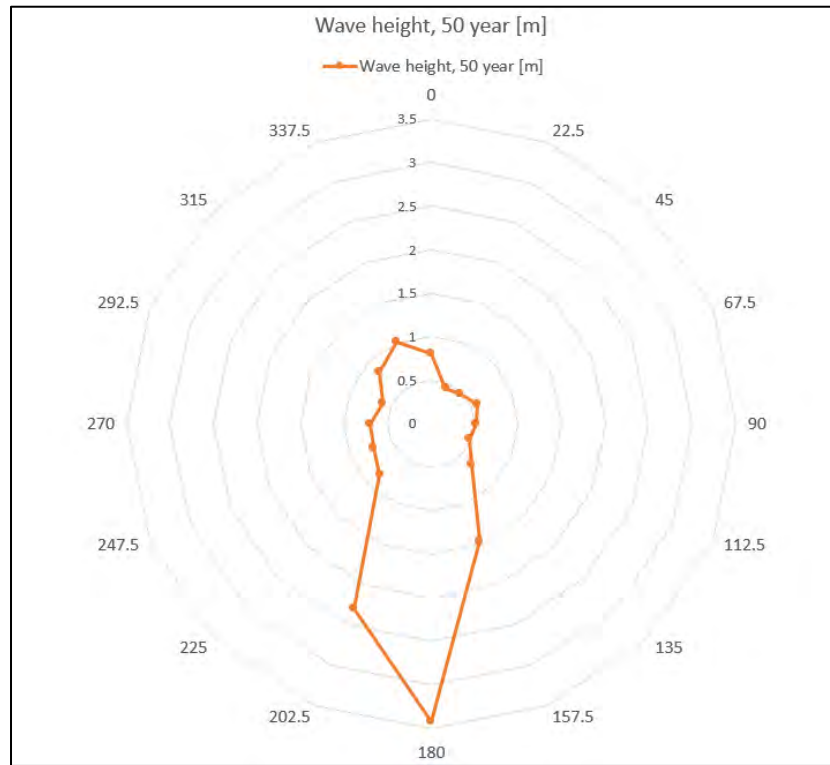



Figure 17 Maximum wave height at 50 year return period and direction [from]- Jordan Bay- Marine Finfish Lease- 1358

4.4.2 Wave/wind conditions for Jordan Bay- Marine Finfish Lease- 1359

The wave and wind results from the STWave model, for the Jordan Bay- Marine Finfish Lease- 1359, are summarized in Table 4. Note that the results in Table 4 indicate significant wave height (H_s) and peak period (T_p) for the selected site. These represent the extreme wave conditions at this coordinate: 43° 40.875'N, 65° 12.280'W.


Table 4 Estimated wave and wind design conditions for Jordan Bay- Marine Finfish Lease- 1359

Wave/Wind conditions	Direction [from] [°]		Wind (m/s)	H_s (m)	T_p (s)
10yr wave/wind	0	N	21.01	1	3.11
	23	NNE	21.96	0.6	2.5
	45	NE	21.96	0.7	2.56
	68	ENE	23.35	0.77	2.5
	90	E	20.06	0.58	2.21
	113	ESE	20.82	2.07	6.6
	135	SE	19.38	2.67	6.61
	158	SSE	20.76	3.65	6.43
	180	S	21.12	3.66	13.84

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

	203	SSW	19.96	0.67	2.92
	225	SW	19.65	0.68	2.47
	248	WSW	21.05	0.63	2.34
	270	W	21.38	0.59	2.3
	293	WNW	21.42	0.37	2
	315	NW	20.69	0.47	3.41
	338	NNW	20.26	0.8	3.1
50yr wave/wind	0	N	24.53	1.17	3.33
	23	NNE	26.05	0.75	2.7
	45	NE	26.14	0.87	2.76
	68	ENE	28.62	0.98	2.7
	90	E	23.69	0.7	2.36
	113	ESE	24.53	2.5	10.17
	135	SE	22.42	2.84	11.5
	158	SSE	24.68	3.97	6.48
	180	S	24.91	4.56	13.73
	203	SSW	22.93	0.77	3.1
	225	SW	22.38	0.78	2.6
	248	WSW	24.55	0.75	2.5
	270	W	24.56	0.68	2.44
	293	WNW	24.44	0.44	2.1
	315	NW	23.46	0.51	3.6
	338	NNW	23.21	0.93	3.3

It should be noted that the return periods indicated for each wave parameter in Table 4 are representative of the boundary condition used to derive that value, not the value itself. Polar plots for maximum wave heights are presented in Figure 18 and Figure 19.

Title	Wind and Wave Conditions – Jordan Bay – Marine Finfish Leases 1358, 1359			
Revision	B	Date Last Revised	2020-05-05	
DSA Project	CMAR-19EXM	Client Project / Reference	N/A	

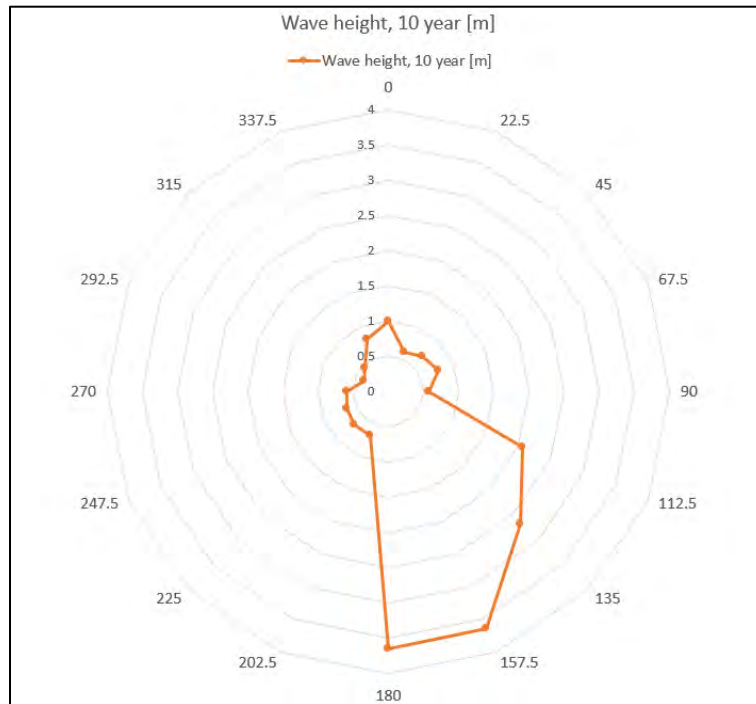


Figure 18 Maximum wave height at 10 year return period and direction [from]- Jordan Bay- Marine Finfish Lease- 1359

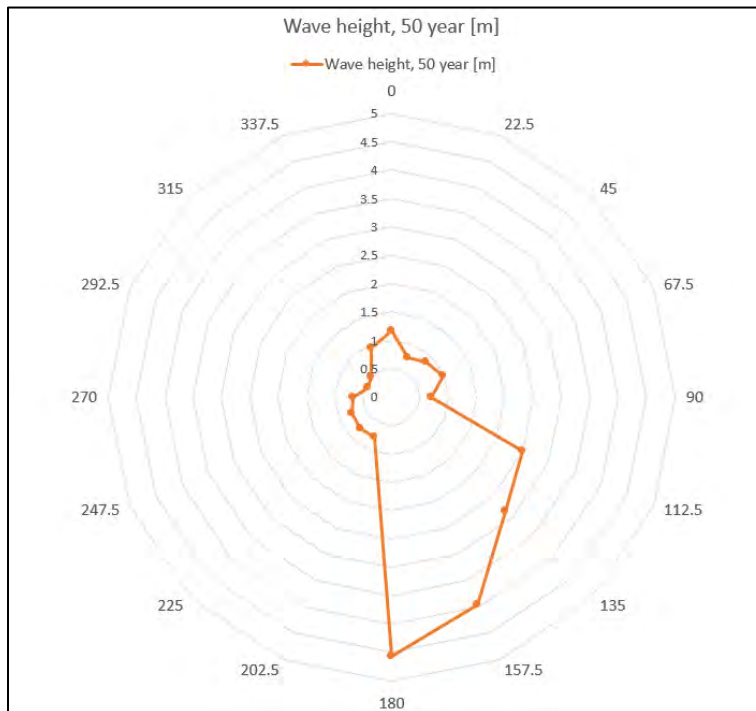


Figure 19 Maximum wave height at 50 year return period and direction [from]- Jordan Bay- Marine Finfish Lease- 1359